


WISECOM, INC.

WS-2814IS6

Card Type	Modem (asynchronous)
Chipset	Rockwell
I/O Options	Voice, microphone in, speaker out
Maximum Data Rate	33.6Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation	Bell 103A/212A ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis, V.34 Rockwell V.FC
Fax Modulation	ITU-T V.17, V.21CH2, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis

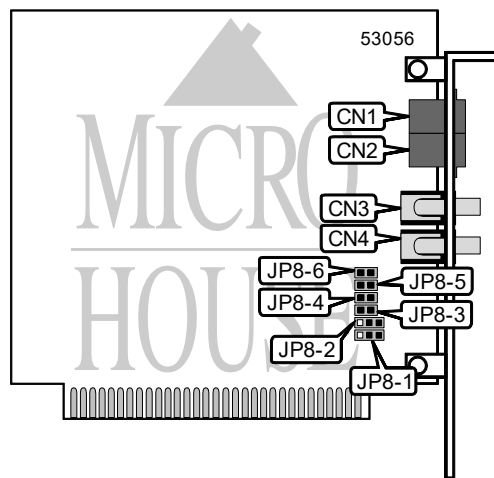

CONNECTIONS			
Function	Label	Function	Label
Telephone line in	CN1	Speaker out	CN3
Telephone line in	CN2	Microphone in	CN4

SERIAL PORT ADDRESS SELECTION			
Setting	JP8-1	JP8-2	
3F8h (COM1:)	Pins 1 & 2 closed	Pins 1 & 2 closed	
2F8h (COM2:)	Pins 2 & 3 closed	Pins 1 & 2 closed	
3E8h (COM3:)	Pins 1 & 2 closed	Pins 2 & 3 closed	
2E8h (COM4:)	Pins 2 & 3 closed	Pins 2 & 3 closed	

INTERRUPT SELECTION				
Setting	JP8-3	JP8-4	JP8-5	JP8-6
IRQ2	Closed	Open	Open	Open
IRQ3	Open	Closed	Open	Open
IRQ4	Open	Open	Closed	Open
IRQ5	Open	Open	Open	Closed

Continued on next page. . .

. . . continued from previous page

SUPPORTED STANDARD COMMANDS	
Basic AT Commands	
+++ , 'comma' , A/	
A, B, D, E, H, L, M, N, O, P, Q, T, V, W, X, Y, Z	
&C, &D, &F, &G, &K, &P, &S, &T, &V, &W, &Y, &Z	
Extended AT Commands	
\A, \B, \K, \N	
%C, %E, %L, %Q	
Special AT Commands	
+MS	
S-Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S23, S24, S25	
S26, S27, S29, S30, S31, S32, S33, S36, S38, S39, S40, S41, S46, S48, S82, S86, S91, S92, S95	
Note: See MHI documentation for complete information.	

UNIDENTIFIED COMMANDS	
Command	Default
S37	0

Proprietary AT Command Set

See WISECOM, INC. WS-2814IM6 for a full command summary.