


# ACTIONTEC ELECTRONIC, INC.

## 33.6 PLUG & PLAY FAX MODEM

<b>Card Type</b>	Modem (asynchronous)
<b>Chipset</b>	Unidentified
<b>I/O Options</b>	Microphone in, speaker out, voice
<b>Maximum Data Rate</b>	33.6Kbps
<b>Maximum Fax Rate</b>	14.4Kbps
<b>Data Modulation</b>	Bell 103A, 212A ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis, V.34 ITU-T V.17, V.21CH2, V.27ter, V.29
<b>Fax Modulation</b>	
<b>Error</b>	MNP5, V.42, V.42bis
<b>Correction/Compression</b>	
<b>Fax Class</b>	Class I
<b>Data Bus</b>	16-bit ISA
<b>Card Size</b>	Full height, half length

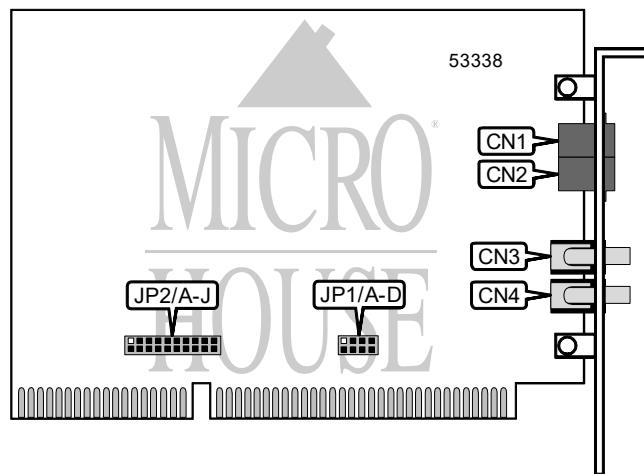

CONNECTIONS			
Function	Label	Function	Label
Telephone line in	CN1	Microphone in	CN3
Telephone line out	CN2	Speaker out	CN4

USER CONFIGURABLE SETTINGS		
Setting	Label	Position

SERIAL PORT ADDRESS SELECTION				
Setting	JP1/A	JP1/B	JP1/C	JP1/D
3F8h (COM1:)	Open	Open	Closed	Closed
2F8h (COM2:)	Closed	Open	Open	Closed
3E8h (COM3:)	Open	Closed	Closed	Open
2E8h (COM4:)	Closed	Closed	Open	Open
i Plug-N-Play	Open	Open	Open	Open

Continued on next page. . .

# ACTIONTEC ELECTRONIC, INC.

## 33.6 PLUG & PLAY FAX MODEM

. . . continued from previous page

INTERRUPT SELECTION					
Setting	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E
3	Closed	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open
5	Open	Open	Closed	Open	Open
7	Open	Open	Open	Closed	Open
10	Open	Open	Open	Open	Closed
11	Open	Open	Open	Open	Open
12	Open	Open	Open	Open	Open
í Plug-N-Play	Closed	Closed	Closed	Closed	Closed

INTERRUPT SELECTION (CON'T)					
Setting	JP2/F	JP2/G	JP2/H	JP2/I	JP2/J
3	Open	Open	Open	Open	Open
4	Open	Open	Open	Open	Open
5	Open	Open	Open	Open	Open
7	Open	Open	Open	Open	Open
10	Open	Open	Open	Open	Open
11	Closed	Open	Open	Open	Open
12	Open	Closed	Open	Open	Open
í Plug-N-Play	Closed	Closed	Closed	Closed	Closed

SUPPORTED STANDARD COMMANDS	
<b>Basic AT Commands</b>	
+++ , 'comma' , A/	
A, C, D, E, H, L, M, Q, V, W	
&C, &F, &K	
<b>Extended AT Commands</b>	
\G, \Q	
%C	
<b>S-Registers</b>	
The S-registers are unidentified.	
Note: See MHI help file for complete information.	