


ARCHIVE CORPORATION SC499R

Card Type	Tape drive controller
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	1/4 inch cartridge tape drive
Tape Format	QIC 11, QIC 24
Data Bus	8-bit ISA
Card Size	Three-quarter length, full-height

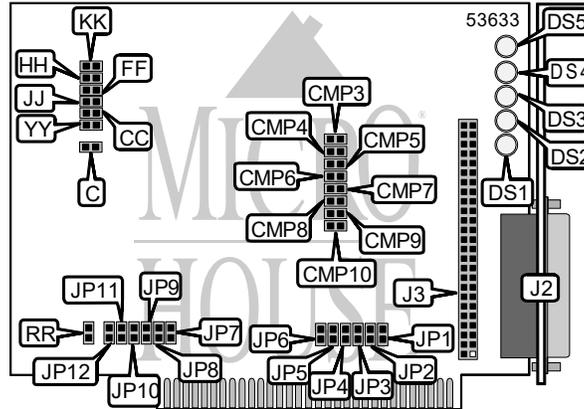

CONNECTIONS			
Function	Label	Function	Label
Tape drive connector - external	J2	Tape drive connector - internal	J3

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	C	Open
í Tape format - QIC-24	CC	Closed
Tape format - QIC-11	CC	Open
í Factory configured - do not alter	FF	Open
í Factory configured - do not alter	HH	Open
í Factory configured - do not alter	JJ	Open
í Power-on test enabled	KK	Closed
Power-on test disabled	KK	Open
í Factory configured - do not alter	RR	Open
í Track selection - 9	YY	Closed
Track selection - 4	YY	Open

DMA CHANNEL SELECTION						
Channel	JP6	JP5	JP4	JP3	JP2	JP1
í 1	Closed	Open	Open	Closed	Open	Open
2	Open	Closed	Open	Open	Closed	Open
3	Open	Open	Closed	Open	Open	Closed

Continued on next page . . .

ARCHIVE CORPORATION SC499R

. . . continued from previous page

BASE I/O ADDRESS SELECTION								
Setting	CMP3	CMP4	CMP5	CMP6	CMP7	CMP8	CMP9	CMP10
0h	On	On	On	On	On	On	On	On
8h	Off	On						
10h	On	Off	On	On	On	On	On	On
18h	Off	Off	On	On	On	On	On	On
20h	On	On	Off	On	On	On	On	On
í 200h	On	On	On	On	On	On	Off	On
7D8h	Off	Off	On	Off	Off	Off	Off	Off
7E0h	On	On	Off	Off	Off	Off	Off	Off
7E8h	Off	On	Off	Off	Off	Off	Off	Off
7F0h	On	Off						
7F8h	Off	Off	Off	Off	Off	Off	Off	Off
Note:	A total of 128 base address settings are available. The jumpers are a binary representation of the decimal memory addresses. Jumper CMP10 is the Most Significant Bit and jumper CMP3 is the Least Significant Bit. The jumpers have the following decimal values: CMP10=1024, CMP9=512, CMP8=256, CMP7=128, CMP6=64, CMP5=32, CMP4=16, CMPA3=8. Turn off the jumpers and add the values of the jumpers and convert to hexadecimal to obtain the correct memory address. (Off=1, On=0)							

INTERRUPT SELECTION						
IRQ	JP7	JP8	JP9	JP10	JP11	JP12
IRQ2	Open	Open	Open	Open	Open	Closed
IRQ3	Open	Open	Open	Open	Closed	Open
IRQ4	Open	Open	Open	Closed	Open	Open
í IRQ5	Open	Open	Closed	Open	Open	Open
IRQ6	Open	Closed	Open	Open	Open	Open
IRQ7	Closed	Open	Open	Open	Open	Open

DIAGNOSTIC LED(S)
Note: The function of the LEDs is unidentified, however on power up or reset all LEDs will light up. When the reset or self test is completed the LEDs will turn off.