


ASKA TECHNOLOGIES
ASKA-2839

Q1/94

Data bus: 16-bit, ISA
Size: Half-length, half-height card
Hard drive supported: Two IDE (AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

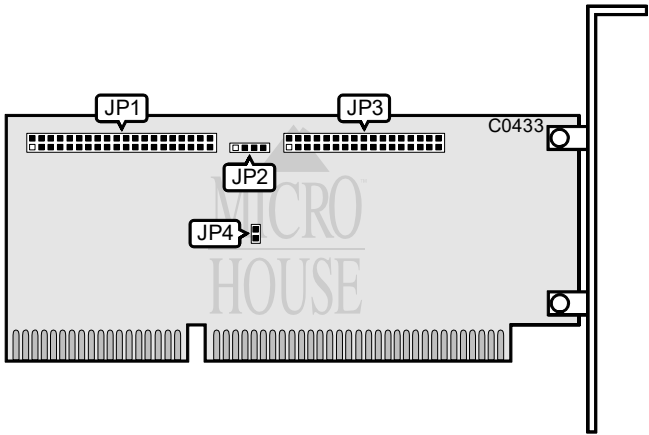

CONNECTIONS		
Function		Location
40-pin AT Interface (IDE) connector		JP1
4-pin connector-Drive active LED		JP2
34-pin control cable connector-floppy drive		JP3

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Floppy drive enabled	JP4	closed
Floppy drive disabled	JP4	open

MISCELLANEOUS TECHNICAL NOTES	
Some versions of this card do not have a floppy enable/disable jumper on board.	