


ZOLTRIX, INC.

FM-VSP336I, FM-VOC336FI

Card Type	Modem (asynchronous)
Chipset	Rockwell
I/O Options	Voice, speakerphone (on FM-VSP336I only), CD-ROM audio in, CD-ROM audio out, line out, microphone in, speaker out
Maximum Data Rate	33.6Kbps
Maximum Fax Rate	14.4Kbps
Data Modulation	Bell 103A, 212A ITU-T V.21, V.22, V.22bis, V.32, V.32bis, V.34 Rockwell V.FC
Fax Modulation	ITU-T V.17, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis
Fax Class	Class I
Data Bus	16-bit ISA
Card Size	Full height, half length

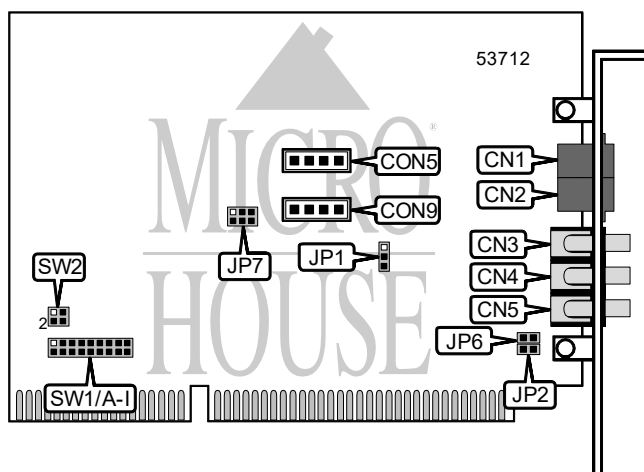

CONNECTIONS			
Function	Label	Function	Label
Telephone line out	CN1	Speaker out	CN5
Telephone line in	CN2	CD-ROM audio out	CON5
Microphone in	CN3	CD-ROM audio in	CON9
Audio line out	CN4		

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
Speaker out amplifier disabled	JP1	Pins 1 & 2 closed	
Speaker out amplifier enabled	JP1	Pins 2 & 3 closed	
Headset mode disabled	JP2	Closed	
Headset mode enabled	JP2	Open	
Internal speaker enabled	JP6	Closed	
Internal speaker disabled	JP6	Open	
í Factory configured - do not alter	JP7	Unidentified	

Continued on next page. . .

ZOLTRIX, INC.

FM-VSP336I, FM-VOC336FI

... continued from previous page

INTERRUPT SELECTION									
Setting	SW1/A	SW1/B	SW1/C	SW1/D	SW1/E	SW1/F	SW1/G	SW1/H	SW1/I
2/9	Open	Open	Open	Open	Closed	Open	Open	Open	Open
3	Open	Open	Open	Open	Open	Open	Open	Open	Closed
4	Open	Open	Open	Open	Open	Open	Open	Closed	Open
5	Open	Open	Open	Open	Open	Open	Closed	Open	Open
7	Open	Open	Open	Open	Open	Closed	Open	Open	Open
10	Open	Open	Open	Closed	Open	Open	Open	Open	Open
11	Open	Open	Closed	Open	Open	Open	Open	Open	Open
12	Open	Closed	Open	Open	Open	Open	Open	Open	Open
15	Closed	Open	Open	Open	Open	Open	Open	Open	Open

SERIAL PORT ADDRESS SELECTION	
Setting	SW2
3F8h (COM1:)	Pins 1 & 2, 3 & 4 closed
2F8h (COM2:)	Pins 3 & 4 closed
3E8h (COM3:)	Pins 1 & 2 closed
2E8h (COM4:)	Open

SUPPORTED STANDARD COMMANDS	
Basic AT Commands	
+++ , 'comma' , A/	
A, B, E, H, L, M, N, O, P, Q, T, V, W, X, Y, Z	
&C, &D, &F, &G, &K, &P, &Q, &R, &S, &T, &V, &W, &Y, &Z	
Extended AT Commands	
\A, \B, \K, \N	
%C, %E, %L, %Q	
Special AT Commands	
+MS	
S-Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S23, S25, S26	
S27, S29, S30, S31, S32, S33, S36, S38, S46, S48, S82, S86, S95	
Note: See MHI help file for complete information.	

UNIDENTIFIED COMMANDS	
Command	Default
S39	Unidentified
S40	Unidentified
S41	Unidentified

Proprietary AT Command Set

See ZOLTRIX, INC. FM-336FI for a full command summary.