


NEWCOM, INC.

336IFX(C), 336IFXV(C)

Card Type	Modem (asynchronous)
Chipset	Unidentified
I/O Options	Voice (on 336ifxv(c) only)
Maximum Data Rate	33.6Kbps
Maximum Fax Rate	14.4Kbps
Data Modulation	Bell 103A, 212A
Fax Modulation	ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis, V.34
Error	ITU-T V.17, V.21CH2, V.27ter, V.29
Correction/Compression	MNP5, V.42, V.42bis
Fax Class	Class I
Data Bus	16-bit ISA
Card Size	Full height, half length

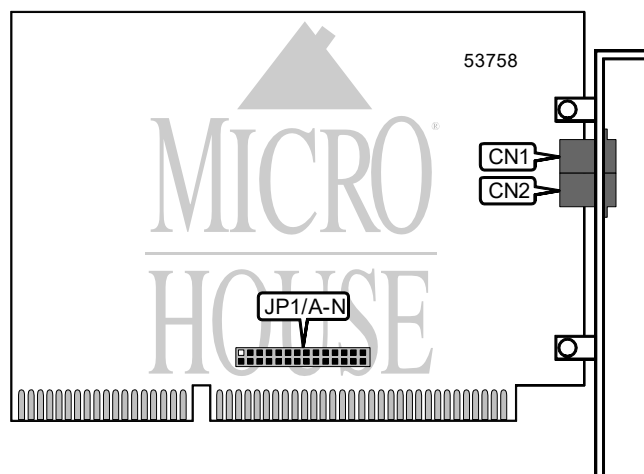

CONNECTIONS			
Function	Label	Function	Label
Telephone line out	CN1	Telephone line in	CN2

PLUG-N-PLAY			
Setting	JP1/H	JP1/I	JP1/J
Enabled	Closed	Closed	Closed
Disabled	Open	Open	Open

Note: If Plug-N-Play mode is enabled, all other jumper settings must also be set for Plug-N-Play.

INTERRUPT SELECTION							
Setting	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F	JP1/G
3	Open	Open	Open	Open	Open	Open	Closed
4	Open	Open	Open	Open	Open	Closed	Open
5	Open	Open	Open	Open	Closed	Open	Open
7	Open	Open	Open	Closed	Open	Open	Open
10	Open	Open	Closed	Open	Open	Open	Open
11	Open	Closed	Open	Open	Open	Open	Open
12	Closed	Open	Open	Open	Open	Open	Open
Plug-N-Play	Closed	Closed	Closed	Closed	Closed	Closed	Closed

Continued on next page. . .

NEWCOM, INC.

336IFX(C), 336IFXV(C)

. . . continued from previous page

SERIAL PORT ADDRESS SELECTION				
Setting	JP1/K	JP1/L	JP1/M	JP1/N
3F8h (COM1:)	Closed	Closed	Open	Open
2F8h (COM2:)	Closed	Open	Open	Closed
3E8h (COM3:)	Open	Closed	Closed	Open
2E8h (COM4:)	Open	Open	Closed	Closed
i Plug-N-Play	Open	Open	Open	Open

SUPPORTED STANDARD COMMANDS	
Basic AT Commands	
+++ , 'comma' , A/	
A, C, D, E, F, H, L, M, N, O, P, Q, T, V, X, Y, Z	
&C, &D, &F, &G, &J, &K, &P, &S, &T, &W, &Y, &Z	
Extended AT Commands	
\A, \B, \C, \G, \J, \N, \O, \Q, \T, \U, \X, \Y, \Z	
%A, %C, %E, %G	
Special AT Commands	
-C, "H, -J, "O	
S-Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S23, S25, S27	
S30, S31, S33, S37	
Note: See MHI help file for complete information.	

IS-101 COMMANDS	
+V Commands	
+VCID, +VCSD, +VDR, +VEM, +VGM, +VGR, +VGS, +VGT, +VIP, +VIT, +VLS, +VNH, +VRA, +VRN, +VRX	
+VSD, +VSM, +VSP, #VSPS, +VTD, +VTS, +VTX	
-S Commands	
-SAC, -SCD, -SDA, -SDS, -SER, -SFX, -SIC, -SIP, -SQR, -SSP, -SSQ, -SSR, -SSV	
Note: The functions of the IS-101 commands are unidentified. These commands are supported on 336ifxv(c) only.	

Proprietary AT Command Set

See NEWCOM, INC. 336IFXSP(C) for a full command summary.