


# FUTURE DOMAIN CORPORATION TMC-1610M, TMC-1610MER, TMC-1610MEX

Q1/94

Data bus: 16-bit, ISA  
 Size: Half-length, half-height card  
 Hard drive supported: Up to seven SCSI devices  
 Floppy drives supported: None

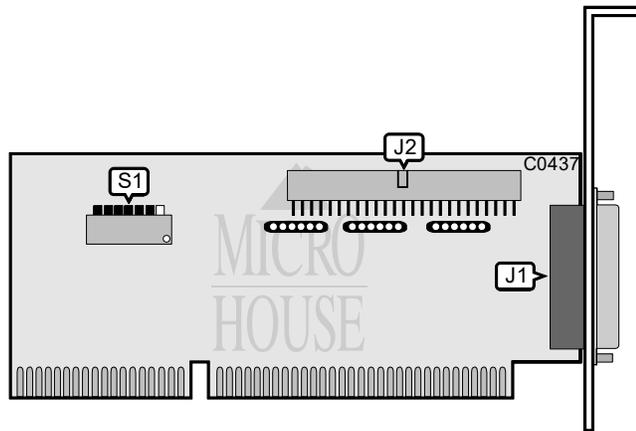

CONNECTIONS	
Function	Location
25-pin SCSI connector - external	J1
50-pin SCSI connector - internal	J2

I/O PORT ADDRESS		
Address	S1/switch 1	S1/switch 2
i 140h	off	off
150h	off	on
160h	on	off
170h	on	on

INTERRUPT REQUEST CONFIGURATION			
IRQ	S1/switch 3	S1/switch 4	S1/switch 5
3	off	off	off
5	off	off	on
10	off	on	off
i 11	off	on	on
14	on	off	on
15	on	on	off
Disabled	on	off	off
Disabled	on	on	on

Continued on next page . . .

# FUTURE DOMAIN CORPORATION

## TMC-1610M, TMC-1610MER, TMC-1610MEX

... continued from previous page

BIOS ADDRESS		
Address	S1/switch 6	S1/switch 7
C800h	off	off
CA00h	off	on
CE00h	on	off
DE00h	on	on

MISCELLANEOUS TECHNICAL NOTES
TMC-1610MER has no BIOS chip installed. TMC-1610MEX has no BIOS socket and no termination power components installed.