


## JPN CORPORATION CA9077

Q2/94

Data bus: 16-bit, ISA  
 Size: Half-length, half-height card  
 Hard drive supported: Two IDE (AT) Interface drives  
 Floppy drives supported: Four 360KB, 720KB, 1.2MB, 1.44MB, or 2.88MB drives

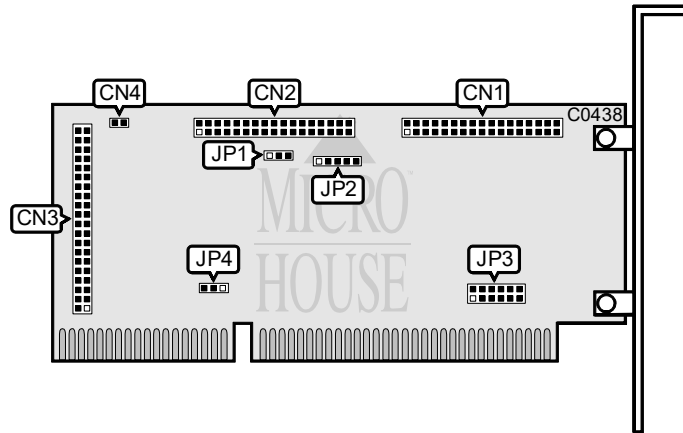

CONNECTIONS	
Function	Location
34-pin control cable connector - floppy drive 0	CN1
34-pin control cable connector - floppy drive 1	CN2
40-pin IDE (AT) Interface connector	CN3
2-pin connector - drive active LED	CN4

BIOS ADDRESS - JP3						
Address	Jumper 1	Jumper 2	Jumper3	Jumper 4	Jumper 5	Jumper 6
C800h	closed	open	open	open	open	open
CC00h	open	closed	open	open	open	open
D000h	open	open	closed	open	open	open
D400h	open	open	open	closed	open	open
D800h	open	open	open	open	closed	open
DC00h	open	open	open	open	open	closed

Continued on next page . . .

# JPN CORPORATION

## CA9077

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Hard drive enabled	JP4	pins 1 & 2 closed
Hard drive disabled	JP4	pins 2 & 3 closed

MISCELLANEOUS TECHNICAL NOTES
Jumper JP1 is factory configured to pins 1 & 2 closed; jumper JP2 is factory configured to pins 1 & 2 closed and pins 3 & 4 closed - do not alter these settings.