


GIGA-BYTE TECHNOLOGY, INC.

GA-450

Q1/94

Data bus: 32-bit, VL-bus
 Size: Three-quarter-length, full-height card
 Hard drive supported: Four IDE (AT) Interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

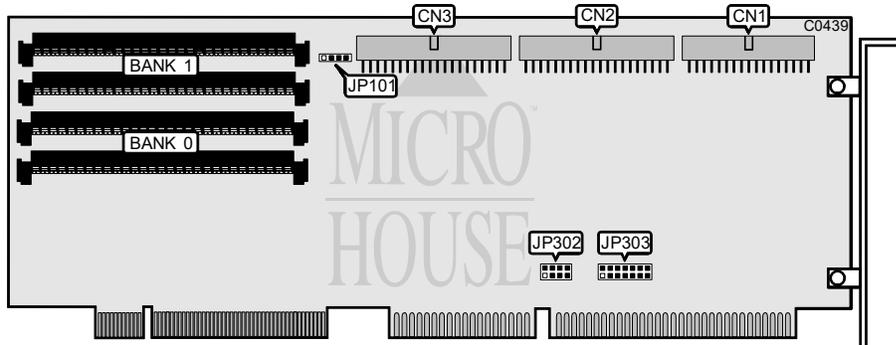

CONNECTIONS	
Function	Location
34-pin control cable connector-floppy drive	CN1
40-pin AT Interface (IDE) connector - IDE-0	CN2
40-pin AT Interface (IDE) connector - IDE-1	CN3
4-pin connector-Drive active LED	JP101

INTERRUPT REQUEST CONFIGURATION				
Address	JP302/jumper 1	JP302/jumper 2	JP302/jumper 3	JP302/jumper 4
5	closed	open	open	open
12	open	closed	open	open
14	open	open	closed	open
15	open	open	open	closed

BIOS ADDRESS			
Address	JP303/jumper 1	JP303/jumper 2	JP303/jumper 3
C800h	open	closed	open
D000h	open	open	closed
D800h	open	closed	closed
Disabled	open	open	open

Continued on next page . . .

GIGA-BYTE TECHNOLOGY, INC.
GA-450

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Hard drive port address is 3F6, 3F7, 1F0-1F7h	JP303/jumper 4	closed
Hard drive port address is 376, 377, 170-177h	JP303/jumper 4	open
í Floppy drive enabled	JP303/jumper 5	closed
Floppy drive disabled	JP303/jumper 5	open
í Normal operation enabled	JP303/jumper 6	closed
Test mode enabled	JP303/jumper 6	open
í CPU speed is 50MHz	JP303/jumper 7	open
CPU speed is 33MHz	JP303/jumper 7	closed