


BUSLOGIC, INC. BT-747D, BT-747S

Q2/94

Data bus: 32-bit, EISA
 Size: Full-length, full-height card
 Hard drive supported: Up to seven SCSI devices
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, 1.44MB, or 2.88MB drives

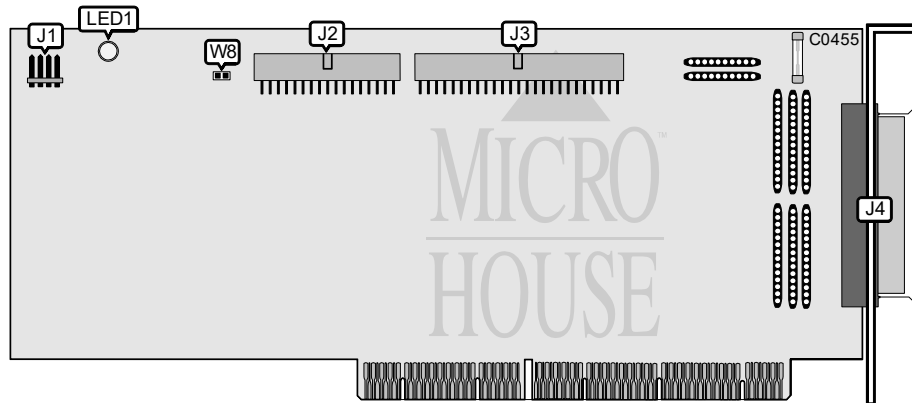

| CONNECTIONS | |
|---|----------|
| Function | Location |
| 4-pin connector - drive active LED | J1 |
| 34-pin control cable connector - floppy drive | J2 |
| 50-pin SCSI connector - internal | J3 |
| 50-pin SCSI connector - external | J4 |

| USER CONFIGURABLE SETTINGS | | |
|----------------------------|----------|---------|
| Function | Location | Setting |
| Floppy drive enabled | W8 | closed |
| Floppy drive disabled | W8 | open |

| STATUS LED | | |
|------------|------------------------------------|---------------------------|
| LED | Status | Function |
| LED1 | On briefly after start-up | Self-test successful |
| | Blinking | SCSI active |
| | 3 blinks, pause, 3 blinks sequence | Searching for SCSI device |

| MISCELLANEOUS TECHNICAL NOTES |
|---|
| Floppy drive can also be enabled by closing pins 41 and 42 on the internal SCSI connector |