


UNIDENTIFIED  
SAI2S7 MULTI I/O PLUS

Q2/94

Data bus: 16-bit, ISA  
Size: Half-length, full-height card  
Hard drive supported: Two IDE (AT) Interface drives  
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

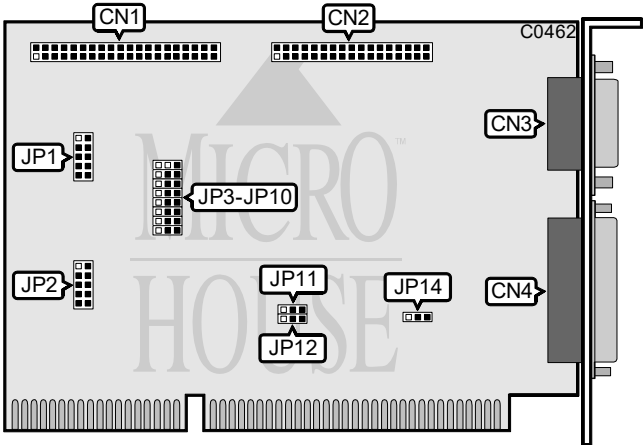

CONNECTIONS		
Function	Location	
40-pin IDE (AT) Interface connector	CN1	
34-pin control cable connector-floppy drive	CN2	
15-pin game port - external	CN3	
25-pin parallel port (LPT1/2/3) - external	CN4	
10-pin serial port (COM1/3/4) - internal	JP1	
10-pin serial port (COM2/3/4) - internal	JP2	

USER CONFIGURABLE SETTINGS			
Function	Location	Setting	
i Hard drive enabled	JP3	pins 2 & 3 closed	
Hard drive disabled	JP3	pins 1 & 2 closed	
i Floppy drive enabled	JP4	pins 2 & 3 closed	
Floppy drive disabled	JP4	pins 1 & 2 closed	
i Serial Port 1 (JP1) uses IRQ4	JP11	pins 2 & 3 closed	
Serial Port 1 (JP1) uses IRQ3	JP11	pins 1 & 2 closed	
i Serial Port 2 (JP2) uses IRQ3	JP12	pins 1 & 2 closed	
Serial Port 2 (JP2) uses IRQ4	JP12	pins 2 & 3 closed	
i Parallel Port (CN4) uses IRQ7	JP14	pins 2 & 3 closed	
Parallel Port (CN4) uses IRQ5	JP14	pins 1 & 2 closed	

Continued on next page . . .

# UNIDENTIFIED SAI2S7 MULTI I/O PLUS

... continued from previous page

SERIAL PORT 1 (JP1) CONFIGURATION		
COM	JP5	JP6
COM1 (3F8h)	pins 2 & 3 closed	pins 1 & 2 closed
COM3 (3E8h)	pins 1 & 2 closed	pins 2 & 3 closed
COM4 (2E8h)	pins 2 & 3 closed	pins 2 & 3 closed
Disabled	pins 1 & 2 closed	pins 1 & 2 closed

SERIAL PORT 2 (JP2) CONFIGURATION		
Function	JP7	JP8
COM2 (2F8h)	pins 2 & 3 closed	pins 1 & 2 closed
COM3 (3E8h)	pins 2 & 3 closed	pins 2 & 3 closed
COM4 (2E8h)	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 1 & 2 closed	pins 1 & 2 closed

PARALLEL PORT (CN4) CONFIGURATION		
Function	JP9	JP10
LPT1 (3BCh)	pins 2 & 3 closed	pins 2 & 3 closed
LPT2 (378h)	pins 2 & 3 closed	pins 1 & 2 closed
LPT3 (278h)	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 1 & 2 closed	pins 1 & 2 closed