


# DIAMOND MULTIMEDIA SYSTEMS, INC.

## SUPRAEXPRESS 144I PLUS

<b>Card Type</b>	Fax, Modem (asynchronous)
<b>Chip Set</b>	Rockwell
<b>Maximum Data Rate</b>	14.4Kbps
<b>Maximum Fax Rate</b>	14.4Kbps
<b>Data Bus</b>	8-bit ISA
<b>Fax Class</b>	Class I
<b>Data Modulation Protocol</b>	Bell 103/212A
	ITU-T V.21, V.22, V.22bis, V.32, V.32bis
<b>Fax Modulation Protocol</b>	ITU-T V.17, V.27ter, V.29
<b>Error Correction/Compression</b>	MNP5, V.42, V.42bis

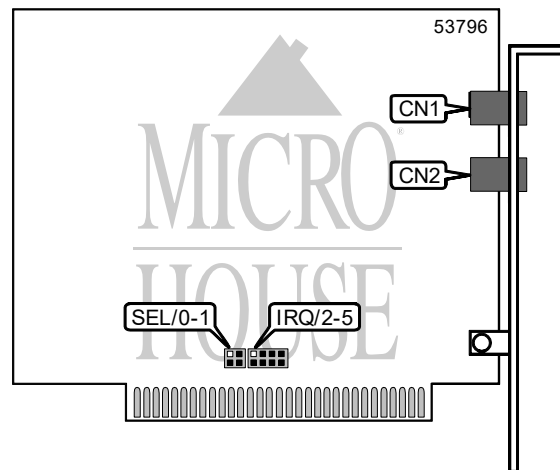

CONNECTIONS			
Function	Label	Function	Label
Line out/in - Unidentified	CN1	Line in/out - Unidentified	CN2

SERIAL PORT ADDRESS			
Setting	SEL/0		SEL/1
COM1 (3F8h)	Open		Open
i COM2 (2F8h)	Closed		Open
COM3 (3E8h)	Open		Closed
COM4 (2E8h)	Closed		Closed

INTERRUPT				
Setting	IRQ/2	IRQ/3	IRQ/4	IRQ/5
2	Closed	Open	Open	Open
i 3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

Continued on next page . . .

# DIAMOND MULTIMEDIA SYSTEMS, INC.

## SUPRAEXPRESS 144I PLUS

. . . continued from previous page

SUPPORTED COMMAND SET	
Basic AT Commands	
AT, '+++', 'comma', A/	
A, E, H, L, N, O, P, R, S, T, U, V, W, Y, Z	
&A, &B, &C, &G, &J, &K, &L, &P, &R, &S, &T, &V, &W, &X, &Y, &Z	
Extended AT Commands	
\A, \B, \C, \E, \G, \J, \K, \L, \N, \O, \Q, \T, \U, \V, \W, \X, \Y, \Z	
%A, %C, %E, %L, %Q, %TT	
S Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S18, S38, S39,	
S46, S48, S82, S86, S90, S91, S92, S95, S99, S108, S109, S110, 201	
Special Commands	
"H, "N, "O,-J, )M, :E, +MS?, +MS	
<b>Note:</b> See MHI Help File for full command documentation.	

## Proprietary AT Command Set

See model SUPRAEXPRESS 288 PNP for a full command summary.