


TEKRAM TECHNOLOGY CO., LTD.
DC-800

Q2/94

Data bus: 16-bit, ISA
Size: Full-length, full-height card
Hard drive supported: Up to seven SCSI devices
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

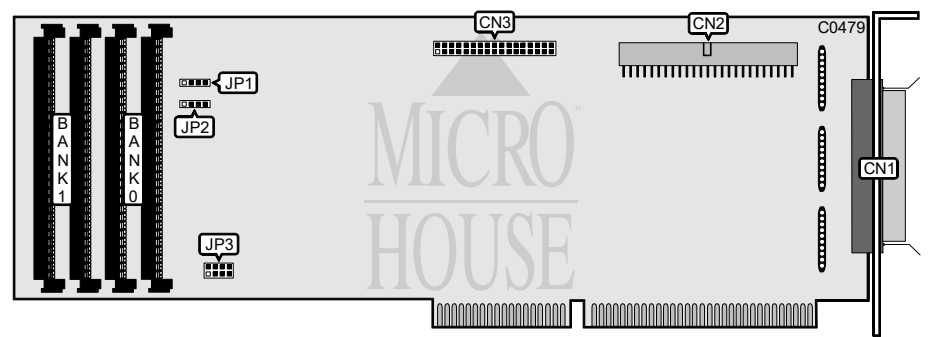

| CONNECTIONS | |
|---|----------|
| Function | Location |
| 50-pin SCSI connector - external | CN1 |
| 50-pin SCSI connector - internal | CN2 |
| 34-pin control cable connector - floppy drive | CN3 |
| 4-pin connector - drive active LED | JP1 |
| 4-pin connector - diagnostic Cache speaker | JP2 |

Continued on next page . . .

TEKRAM TECHNOLOGY CO., LTD.

DC-800

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|----------------------------|--------------|---------|
| Function | Location | Setting |
| i Floppy drive enabled | JP3/jumper 1 | closed |
| Floppy drive disabled | JP3/jumper 1 | open |

| I/O Port Address | | | |
|------------------|--------------|--------------|--------------|
| Address | JP3/jumper 2 | JP3/jumper 3 | JP3/jumper 4 |
| i 330h | closed | closed | closed |
| 334h | closed | open | closed |
| 230h | open | closed | closed |
| 234h | open | closed | open |
| 130h | open | open | closed |
| 134h | open | open | open |

| MISCELLANEOUS TECHNICAL NOTES | |
|---|--|
| At least one pair of SIMM memory modules (256KB, 1MB, or 4MB) of the same size must be installed in Bank 0 in order for the controller to function. | |