


DIAMOND MULTIMEDIA SYSTEMS, INC.

SUPRAFAX MODEM 24/96

Card Type	Fax, Modem (asynchronous)
Chip Set	Rockwell
Maximum Data Rate	2400bps
Maximum Fax Rate	9600bps
Data Bus	8-bit ISA
Fax Class	Class I
Data Modulation Protocol	Bell 103/212A
	ITU-T V.21, V.22, V.22bis
Fax Modulation Protocol	ITU-T V.21CH2, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis

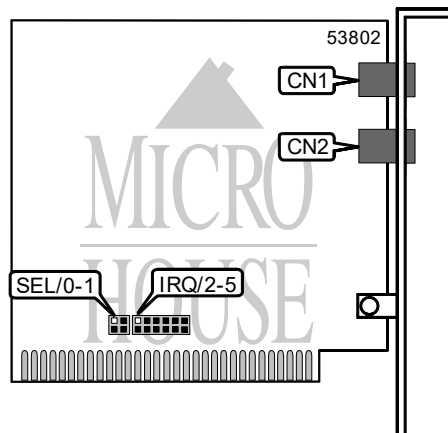

CONNECTIONS			
Function	Label	Function	Label
Line out/in - Unidentified	CN1	Line in/out - Unidentified	CN2

SERIAL PORT ADDRESS		
Setting	SEL/0	SEL/1
COM1 (3F8h)	Open	Open
i COM2 (2F8h)	Closed	Open
COM3 (3E8h)	Open	Closed
COM4 (2E8h)	Closed	Closed

INTERRUPT				
Setting	IRQ/2	IRQ/3	IRQ/4	IRQ/5
2	Closed	Open	Open	Open
i 3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

MISCELLANEOUS TECHNICAL NOTE
Note: This modem sends Faxes at 9600bps and receives at 4800pbs

Continued on next page . . .

DIAMOND MULTIMEDIA SYSTEMS, INC.

SUPRAFAX MODEM 24/96

. . . continued from previous page

SUPPORTED COMMAND SET
Basic AT Commands
AT, '+++', 'comma', A/
A, C, D, E, F, H, L, N, O, P, Q, R, S, T, U, V, W, Y, Z
&A, &B, &C, &G, &J, &K, &L, &P, &S, &T, &V, &W, &X, &Y, &Z
Extended AT Commands
\C, \E, \O, \Q, \T, \U, \V, \X, \Y, \Z
%A, %TT
S Registers
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S18, S25, S26,
S38, S46, S48, S82, S86, S90, S91, S92, S95, S99, S108, S109, S110
Special Commands
"H, "N, "O, -J,)M, +MS?
Note: See MHI Help File for full command documentation.

Proprietary AT Command Set

See document SUPRAFAXMODEM 288I for a full command summary.