


TEKRAM TECHNOLOGY CO., LTD.
DC-880

Q2/94

Data bus: 16-bit, ISA
Size: Full-length, full-height card
Hard drive supported: Up to seven SCSI devices
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

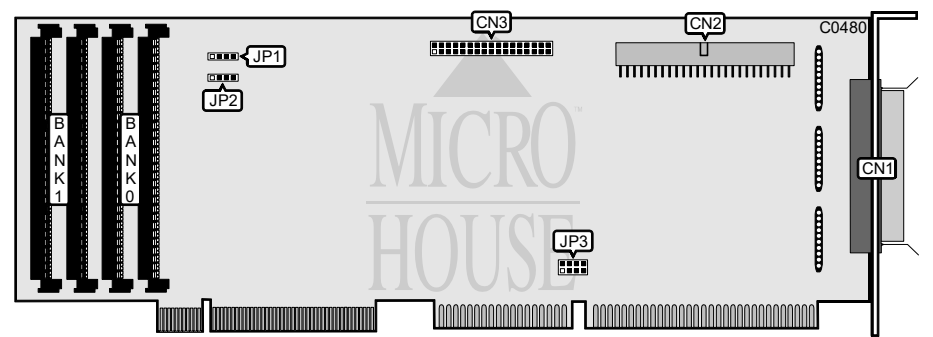

CONNECTIONS	
Function	Location
50-pin SCSI connector - external	CN1
50-pin SCSI connector - internal	CN2
34-pin control cable connector - floppy drive	CN3
4-pin connector - drive active LED	JP1
4-pin connector - diagnostic Cache speaker	JP2

Continued on next page . . .

TEKRAM TECHNOLOGY CO., LTD.

DC-880

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Floppy drive enabled	JP3/jumper 1	closed
Floppy drive disabled	JP3/jumper 1	open

I/O Port Address			
Address	JP3/jumper 2	JP3/jumper 3	JP3/jumper 4
i 330h	closed	closed	closed
334h	closed	open	closed
230h	open	closed	closed
234h	open	closed	open
130h	open	open	closed
134h	open	open	open

MISCELLANEOUS TECHNICAL NOTES	
At least one pair SIMM memory modules (256KB, 1MB, or 4MB) of the same size must be installed in Bank 0 in order for the controller to function.	