


DIAMOND FLOWER, INC.

DIO-100

Card Type	Multi-I/O card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Parallel port, serial ports (2)
Data Bus	8-bit ISA

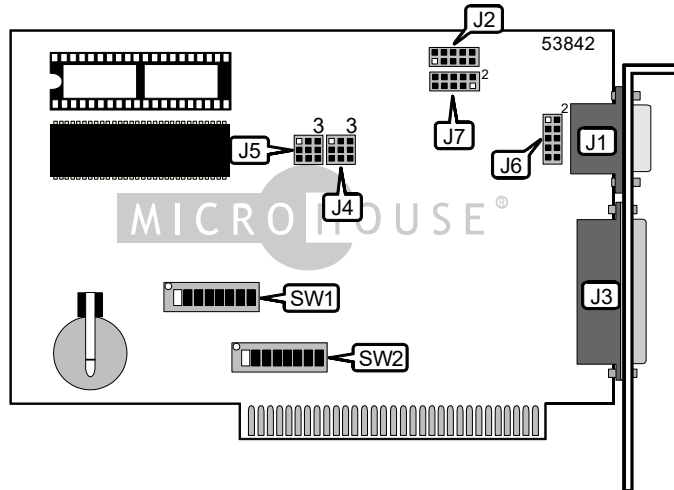

CONNECTIONS			
Function	Label	Function	Label
Serial port 1	J1	Parallel port	J3
Serial port 2	J2		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Parallel port enabled	SW1/1	On
Parallel port disabled	SW1/1	Off
Clock/Calendar enabled	SW1/2	On
Clock/Calendar disabled	SW1/2	Off
Serial port 1 enabled	SW1/3	On
Serial port 1 disabled	SW1/3	Off
Serial port 2 enabled	SW1/4	On
Serial port 2 disabled	SW1/4	Off

PARALLEL PORT ADDRESS SELECTION	
Setting	SW1/5
LPT1 (378h)	Off
LPT2 (278h)	On

SERIAL PORT 1 ADDRESS SELECTION	
Setting	SW1/6
COM1 (3F8h)	Off
COM3 (3E8h)	On

SERIAL PORT 2 ADDRESS SELECTION	
Setting	SW1/7
COM2 (2F8h)	Off
COM4 (2E8h)	On

Continued on next page . . .

DIAMOND FLOWER, INC.

DIO-100

. . . continued from previous page

SERIAL PORT 1 INTERRUPT SELECTION		
IRQ	SW2/3	SW2/4
IRQ3	On	Off
IRQ4	Off	On

SERIAL PORT 2 INTERRUPT SELECTION		
IRQ	SW2/1	SW2/2
IRQ3	On	Off
IRQ4	Off	On

PARALLEL PORT INTERRUPT SELECTION		
IRQ	SW2/5	SW2/6
IRQ5	Off	On
IRQ7	On	Off

CLOCK/CALENDAR INTERRUPT SELECTION		
IRQ	SW2/7	SW2/8
IRQ2	Off	On
IRQ5	On	Off

SERIAL PORT 1 DTE/DCE SELECTION	
Setting	J6
DTE	Pins 1 & 2, 3 & 4, 5 & 6, 7 & 8, 9 & 10 closed
DCE	Pins 1 & 2, 3 & 5, 4 & 6, 7 & 9 8 & 10 closed

SERIAL PORT 2 DTE/DCE SELECTION	
Setting	J7
DTE	Pins 1 & 2, 3 & 4, 5 & 6, 7 & 8, 9 & 10 closed
DCE	Pins 1 & 2, 3 & 5, 4 & 6, 7 & 9 8 & 10 closed

SERIAL PORT 1 NORMAL/FORCE TRUE SELECTION	
Setting	J4
Normal	Pins 1 & 2, 4 & 5, 7 & 8 closed
Force True	Pins 2 & 3 5 & 6, 8 & 9 closed

SERIAL PORT 2 NORMAL/FORCE TRUE SELECTION	
Setting	J5
Normal	Pins 1 & 2, 4 & 5, 7 & 8 closed
Force True	Pins 2 & 3 5 & 6, 8 & 9 closed