


ADAPTEC, INC.
AHA-2740T, AHA-2742, AHA-2742T, AHA-2740A,
AHA-2742A, AHA-2740A-TWIN, AHA-2742A-TWIN

Q2/94

Data bus: 32-bit, EISA
Size: Half-length, full-height card
Hard drive supported: Up to seven SCSI devices
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

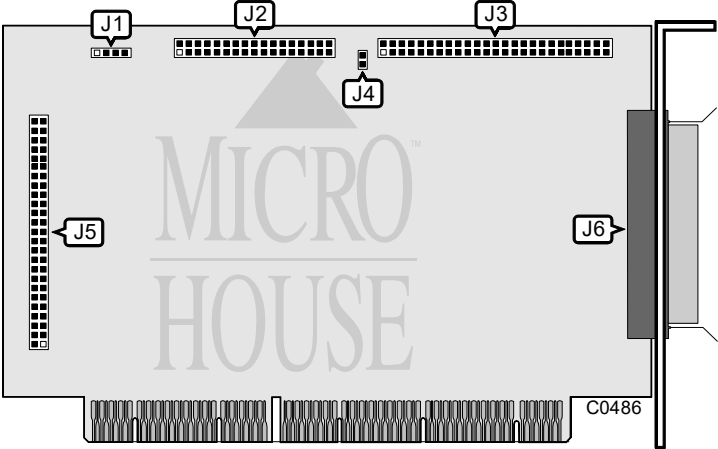

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	J1
34-pin control cable connector - floppy drive (optional)	J2
50-pin SCSI Channel A connector - internal	J3
50-pin SCSI Channel B connector - internal (optional)	J5
50-pin SCSI Channel A connector - external	J6

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Floppy drive enabled	J4	closed
Floppy drive disabled	J4	open
Note: Jumper J4 is only present on those boards with a floppy drive.		