


3COM CORPORATION

COURIER DUAL STANDARD V.34 FAX (INTERNAL)

Card Type	Fax, Modem (asynchronous/synchronous)
Chip Set	U.S. Robotics
Maximum Data Rate	28.8Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103/212A ITU-T V.21, V.22, V.22bis, V.23, V.25bis, V.32, V.32bis, V.34 Rockwell V.FC U.S. Robotics HST, V.32terbo
Fax Modulation Protocol	ITU-T V.17, V.21, V.27ter, V.29
Error Correction/Compression	HST, MNP5, V.42, V.42bis

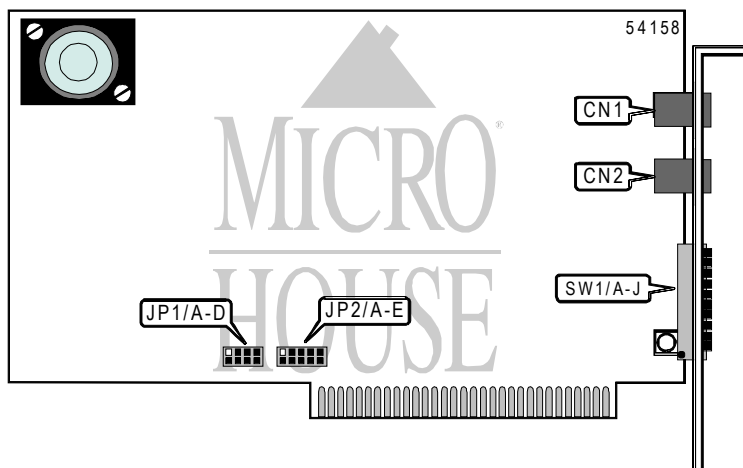

CONNECTIONS			
Function	Label	Function	Label
Line out	CN1	Line in	CN2

Continued on next page . . .

3COM CORPORATION

COURIER DUAL STANDARD V.34 FAX (INTERNAL)

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í DTR normal	SW1/A	Off
DTR forced high	SW1/A	On
í Verbose (word) format enabled	SW1/B	Off
Numeric format enabled	SW1/B	On
í Result code display enabled	SW1/C	On
Result code display disabled	SW1/C	Off
í Local echo enabled	SW1/D	Off
Local echo disabled	SW1/D	On
í Auto-answer disabled	SW1/E	On
Auto-answer enabled, off-hook on first ring	SW1/E	Off
í CD normal	SW1/F	Off
CD forced high	SW1/F	On
í Result code display enabled in both originate and answer mode	SW1/G	Off
Result code display enabled in originate mode only	SW1/G	On
í Smart mode	SW1/H	On
Dumb mode	SW1/H	Off
í Escape code response: modem goes on-hook, off-line command mode, returns 'NO CARRIER'	SW1/I	Off
Escape code response: modem stays on-line, on-line command mode, returns 'OK'	SW1/I	On
í Reset and load from profiles in NVRAM	SW1/J	Off
Reset and load from factory settings in ROM	SW1/J	On

SERIAL PORT ADDRESS				
Setting	JP1/A	JP1/B	JP1/C	JP1/D
COM1 (3F8h)	Closed	Open	Open	Open
COM2 (2F8h)	Open	Closed	Open	Open
COM3 (3E8h)	Open	Open	Closed	Open
COM4 (2E8h)	Open	Open	Open	Closed

INTERRUPT SELECTION					
Setting	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E
2	Closed	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open
4	Open	Open	Closed	Open	Open
5	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Closed

Proprietary AT Command Set

See document V2007 for a full command summary.