


ELITEGROUP COMPUTER SYSTEMS, INC.

C190

Q3/94

Data bus: 16-bit ISA
 Size: Three quarter-length, full-height card
 Hard drive supported: One IDE (AT) interface drive
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, 1.44MB drives

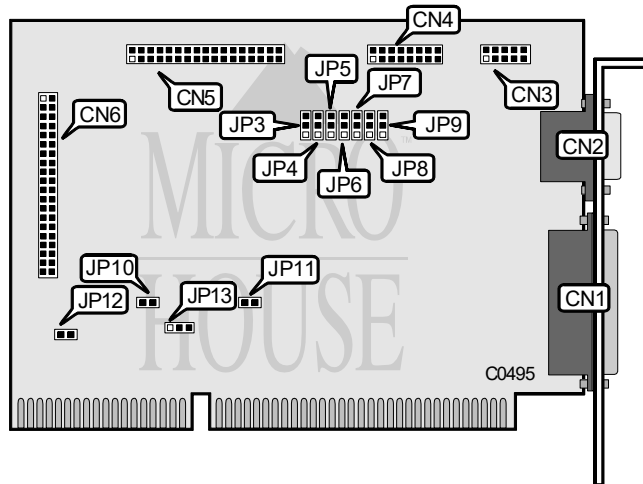

CONNECTIONS			
Function	Location	Function	Location
Parallel port	CN1	Game port	CN4
Serial port 1	CN2	Floppy drive interface	CN5
Serial port 2	CN3	IDE interface	CN6

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive interface enabled	JP8	pins 2 & 3 closed
Floppy drive interface disabled	JP8	pins 1 & 2 closed
í Factory configured - do not alter	JP9	pins 2 & 3 closed
í Factory configured - do not alter	JP13	pins 2 & 3 closed
í IDE interface enabled	JP10 & JP11	closed
IDE interface disabled	JP10 & JP11	open
í Factory configured - do not alter	JP12	N/A

Continued on next page. . .

ELITEGROUP COMPUTER SYSTEMS, INC.

C190

...continued from previous page

PARALLEL PORT CONFIGURATION		
LPT	JP3	JP4
í 2	pins 2 & 3 closed	pins 2 & 3 closed
1	pins 1 & 2 closed	pins 2 & 3 closed
3	pins 2 & 3 closed	pins 1 & 2 closed
Disabled	pins 1 & 2 closed	pins 1 & 2 closed

SERIAL PORT CONFIGURATION				
Port 1 (CN2)	Port 2 (CN3)	JP5	JP6	JP7
í COM1	í COM2	pins 2 & 3 closed	pins 2 & 3 closed	pins 2 & 3 closed
COM1	Disabled	pins 2 & 3 closed	pins 1 & 2 closed	pins 2 & 3 closed
COM2	COM1	pins 2 & 3 closed	pins 2 & 3 closed	pins 1 & 2 closed
Disabled	COM1	pins 1 & 2 closed	pins 2 & 3 closed	pins 1 & 2 closed
Disabled	COM2	pins 1 & 2 closed	pins 2 & 3 closed	pins 2 & 3 closed
COM2	Disabled	pins 2 & 3 closed	pins 1 & 2 closed	pins 1 & 2 closed
Disabled	Disabled	pins 1 & 2 closed	pins 1 & 2 closed	open