


CMS ENHANCEMENTS, INC. ST412 CONTROLLER CARD (MFM)

Q3/94

Data bus: 16-bit ISA
 Size: Three quarter-length, full-height card
 Hard drive supported: Two ST506/412 MFM drives
 Floppy drives supported: None

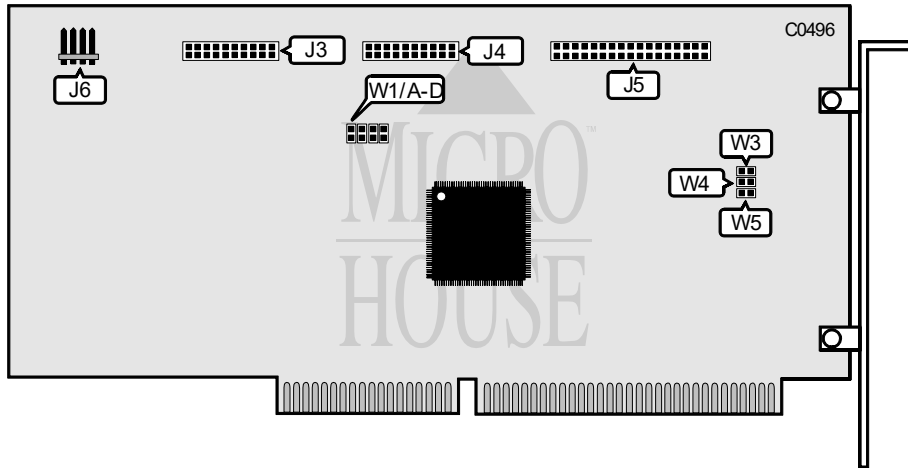

CONNECTIONS			
Function	Location	Function	Location
20-pin data cable connector - drive 1	J3	34-pin control cable connector	J5
20-pin data cable connector - drive 0	J4	External LED connector	J6

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Drive in latched mode	W1/A	open
Drive in non-latched mode	W1/A	closed
í Factory configured - do not alter	W1/B	open
í Caching enabled	W1/C	open
Caching disabled	W1/C	closed
í Factory configured - do not alter	W1/D	open
í Primary port I/O address select C800h, D000h, or D800h	W3	open
Alternate port I/O address select CC00h, D400h	W3	closed
í Factory configured - do not alter	W4	N/A
í Factory configured - do not alter	W5	N/A