
Q3/94

CMS ENHANCEMENTS, INC. HBA-CMS3

Data bus: 16-bit ISA

Size: Half-length, full-height card
Hard drive supported: Two IDE (AT) interface drives
Floppy drives supported: 360KB, 720KB, 1.2MB, 1.44MB

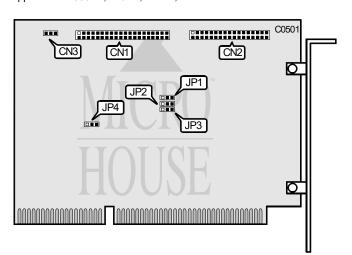

CONNECTIONS		
Function	Location	
40-pin IDE(AT) interface connector	CN1	
34-pin control cable connector - floppy drive	CN2	
IDE interface external LED connector	CN3	

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Primary address select	JP1 & JP2	pins 1 & 2 closed
Alternate address select	JP1 & JP2	pins 2 & 3 closed
í IDE interface enabled	JP3	pins 2 & 3 closed
IDE interface disabled	JP3	pins 1 & 2 closed
í Floppy drive interface enabled	JP4	pins 2 & 3 closed
Floppy drive interface disabled	JP4	pins 1 & 2 closed