


CMS ENHANCEMENTS, INC.
ST08A

Q3/94

Data bus: 16-bit ISA
Size: Half length, full-height card
Hard drive supported: Two IDE(AT) interface drives
Floppy drives supported: 360KB, 720KB, 1.2MB, 1.44MB

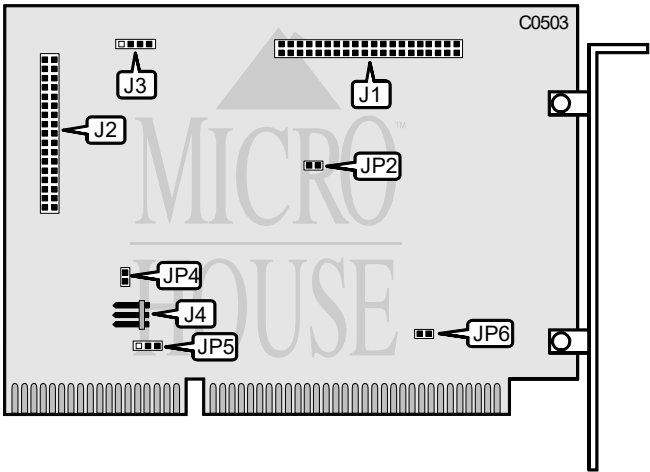

CONNECTIONS	
Function	Location
40-pin IDE(AT) interface connector	J1
34-pin control cable connector - floppy drive	J2
External LED connector	J3
External power supply	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Primary floppy drive I/O address enabled	JP2	open
Alternate floppy drive I/O address enabled	JP2	closed
Floppy drive interface enabled	JP4	closed
Floppy drive interface disabled	JP4	open
IRQ14 connected to AT bus	JP5	pins 2 & 3 closed
IRQ14 cleared for IDE busy signal	JP5	pins 1 & 2 closed
IOCHRDY not connected to host	JP6	open
IOCHRDY connected to host	JP6	closed