


MEDIA FORTE PRODUCTS PTE., LTD.

RADIO-3DX (SF16-FMD)

RADIOMAX2 3X (SF16-FME)

Card Type
Chip Set
Maximum Onboard Memory
I/O Options

Sound card
Roland
Unidentified
Game port, FM radio, audio line-in, microphone, speaker, antenna, audio CD
CD
16-bit ISA

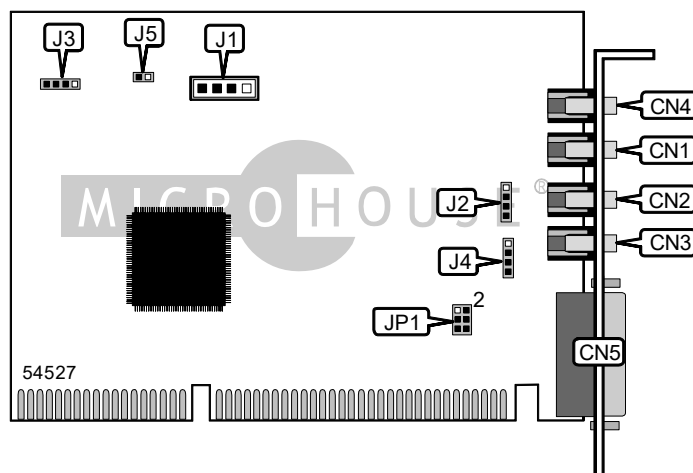

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Audio CD input connector	J1
Microphone in	CN2	Microphone in	J2
Speaker-out	CN3	Master volume control connector	J3
Antenna in	CN4	Speaker out	J4
MIDI/Game port	CN5	PC Speaker input	J5

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Output via speakers	JP1	Pins 1 & 2, 4 & 5 closed
Output via line out	JP1	Pins 2 & 3, 5 & 6 closed

MISCELLANEOUS TECHNICAL NOTES
The Radio-3DX (SF16-FMD) utilizes the Roland CT2511 chip and produces 3-D sound while the Radiomax2 3X (SF16-FME) utilizes the Roland ES1869 chip and does not produce 3-D sound.