
CMS ENHANCEMENTS, INC. HCWDAT240R

Data bus: 16-bit ISA

Half length, full-height card
Hard drive supported:
Floppy drives supported:
Two IDE(AT) interface drives
360KB, 720KB, 1.2MB, 1.44MB

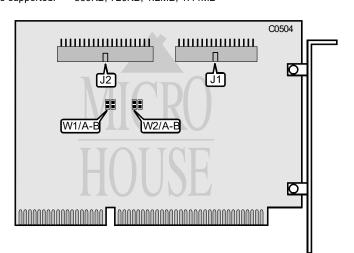

CONNECTIONS		
Function	Location	
34-pin control cable connector - floppy drive	J1	
40-pin IDE(AT) interface connector	J2	

DIRQ 14 CONFIGURATION		
DIRQ14	W1/A	W1/B
í Passed directly to host	open	closed
Gated to host	closed	open

FLOPPY DRIVE CONFIGURATION		
Address	W2/A	W2/B
í 3F0 - 3F7h	closed	open
370 - 377h	closed	closed
Disabled	open	closed
Invalid	open	open