


MEDIAFORTE PRODUCTS PTE., LTD.

MOMENTA K56X INTERNAL MODEM

Card Type	Modem/Fax card
Chip Set	Unidentified
I/O Options	Line out (RJ-11), line in (RJ-11), microphone jack, speaker jack
Maximum Modem Rate	56Kbps
Maximum Fax Rate	14.4Kbps
Data Modulation Protocol	Bell 103A/212A
Fax Modulation Protocol	ITU-T V.22, V.22bis, V.32, V.32 bis, V.34, K56 flex, V.80
Error Correction/Compression	ITU-T V.17, V.21CH2, V.27ter, V.29
Fax Class	MNP5, V.42, V.42bis
Data Bus	Class I 8-bit ISA

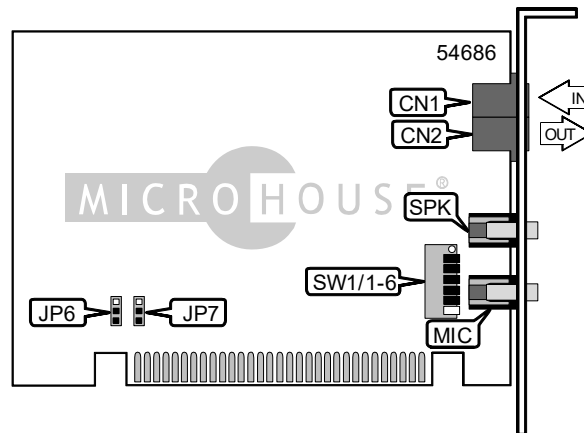

CONNECTIONS			
Function	Label	Function	Label
Line In	CN1	Speaker jack	SPK
Line out	CN2	Microphone jack	MIC
Note: Microphone and speaker jacks are not available on all cards			

USER CONFIGURABLE SETTINGS			
Setting	JP6		JP7
Plug & Play enabled	Pins 1 & 2 closed		Pins 1 & 2 closed
Plug & play disabled	Pins 2 & 3 closed		Pins 2 & 3 closed

SERIAL PORT ADDRESS/INTERRUPT							
Setting	IRQ	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
COM1 (3F8h)	IRQ4	On	On	Off	Off	On	Off
COM2 (2F8h)	IRQ3	Off	On	Off	On	Off	Off
COM3 (3E8h)	IRQ5	On	Off	Off	Off	Off	On
COM3 (3E8h)	IRQ4	On	Off	Off	Off	On	Off
COM4 (2E8h)	IRQ2	Off	Off	On	Off	Off	Off
COM4 (2E8h)	IRQ3	Off	Off	Off	On	Off	On
Disabled	Disabled	Off	Off	Off	Off	Off	Off
Note: Settings should be disabled when using Plug n' Play mode.							

Continued on next page . . .

MEDIAFORTE PRODUCTS PTE., LTD. MOMENTA K56 INTERNAL MODEM

. . . continued from previous page

SUPPORTED COMMAND SET	
Basic AT Commands	
AT, '+++', A/	
A, B, E, H, M, O, P, Q, S, T, V, X, Y, Z	
&C, &P, &R, &T, &V, &W, &Y, &Z	
Extended AT Commands	
\A, \B, \K, \N	
%C, %E, %L, %Q	
Special Commands	
+MS	
S Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S23, S24, S25	
S26, S27, S28, S29, S30, S31, S32, S33, S36, S37, S38, S39, S40	
S41, S46, S48, S82, S86, S91, S92, S95	
Note: See MHI Help File for full command documentation.	

Proprietary AT Command Set

For a full command summary, see MEDIAFORTE PRODUCTS PTE., LTD., MOMENTA K56 EXTERNAL MODEM