


COMMWAVE V.34 28.8KBPS

Card Type	Modem
Chipset	NSP
Maximum Modem Rate	28.8Kbps
Maximum Fax Rate	14.4Kbps
Fax Class	Class I & II
Modem Modulation Protocol	Bell 103A/212A
	ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis, V.34
Fax Modulation Protocol	ITU-T V.17, V.21 CH2, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis
Data Bus	8-bit ISA

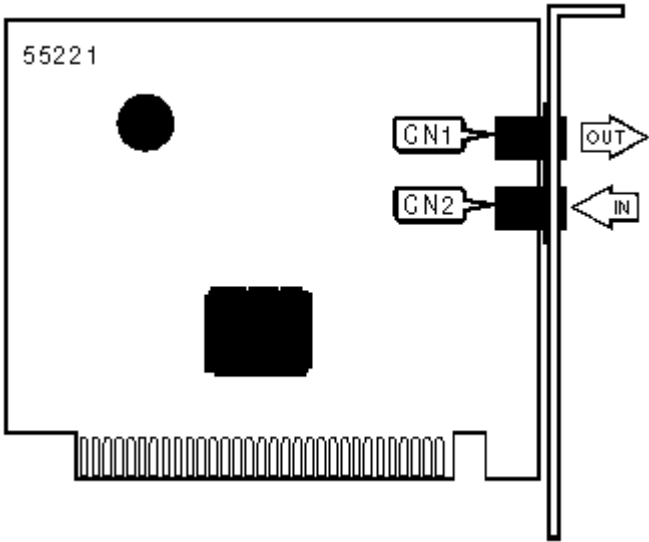

CONNECTIONS

Function	Label	Function	Label
Line out	CN1	Line in	CN2

SUPPORTED COMMAND SET

Basic AT Commands

- AT, A/
- A, E, H, L, M, O, P, Q, T, V, W, X, Y, Z
- &C, &F, &G, &W, &X, &Y, &Z

Extended AT Commands

- \A, \B, \G, \K, \L, \N
- %C, %L, %Q

S Registers

S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S18, S25, S30, S32, S33, S38, S91

Special Commands

#CID

Voice Commands

#BDR, #MDL?, #MFR?, #REV?, #SPK, #TL, #VBQ?, #VBT, #VCI?, #VLS, #VRA, #VRN, #VRX

#VSD, #VSK, #VSP, #VSS, #VTD, #VTS, #VTX

Note: See MHI Help File for full command documentation.

Proprietary AT Command Set

For a full command summary, see MULTIWAVE INNOVATION, INC. COMMWAVE V.34 PLUG & PLAY (VER.1.0)