


CMS ENHANCEMENTS, INC. ST412 CONTROLLER CARD (RLL)

Q3/94

Data bus: 16-bit ISA
 Size: Three-quarter length, full-height card
 Hard drive supported: Two RLL ST412 drives
 Floppy drives supported: None

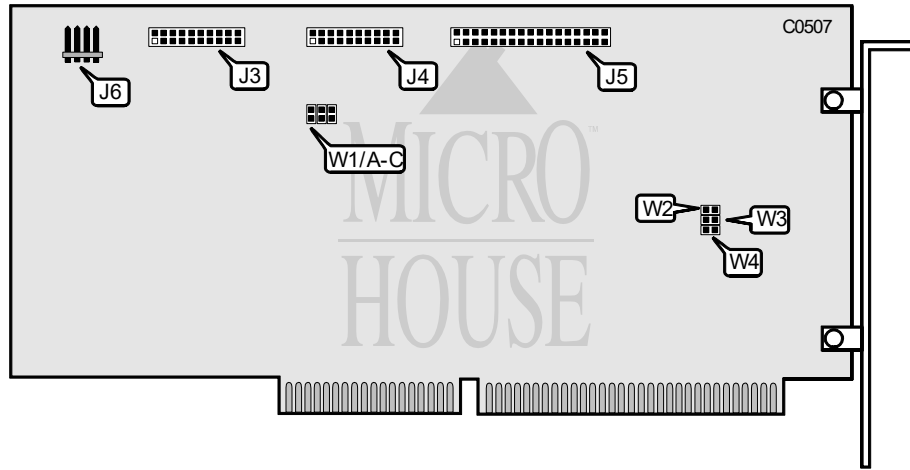

CONNECTIONS	
Function	Location
20-pin data cable connector - drive 1	J3
20-pin data cable connector - drive 0	J4
34-pin control cable connector - hard drive	J5
External LED connector	J6

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Latched hard disk mode enabled	W1/A	open
Non-latched hard disk mode enabled	W1/A	closed
í Four byte ECC enabled	W1/B	open
Seven byte ECC enabled	W1/B	closed
í Caching enabled	W1/C	open
Caching disabled	W1/C	closed
í BIOS enabled	W2	open
BIOS disabled	W2	closed
í Primary I/O address select	W3	open
Alternate I/O address select	W3	closed
í Factory configured - do not alter	W4	N/A