


MT5634ZPX

Card Type	Modem
Chip Set	Unidentified
I/O Options	Line out, line in, microphone in, speaker out
Maximum Modem Rate	56Kbps
Maximum Fax Rate	14.4Kbps
Data Modulation Protocol	Bell 103/212A
	ITU-T V.22, V.22bis, V.32ter, V.32bis, V.34, 56Kflex
Fax Modulation Protocol	ITU-T V.17, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis
Fax Class	Class I
Data Bus	16-bit ISA

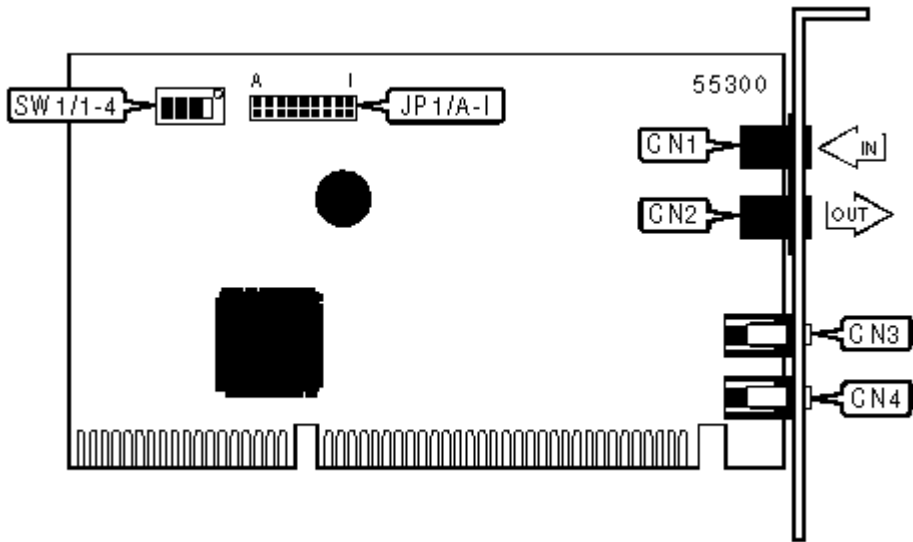

CONNECTIONS

Function	Label	Function	Label
Line in (RJ-11)	CN1	Microphone in	CN3
Line out (RJ-11)	CN2	Speaker out	CN4

USER CONFIGURABLE SETTINGS

Setting	Label	Position
■ Plug & play enabled	SW1/1	Off
Plug & play disabled	SW1/1	On
Factory configured - do not alter	SW1/4	Unidentified

SERIAL PORT ADDRESS

Setting	SW1/2	SW1/3
COM1 (3F8h)	Off	Off

COM2 (2F8h)	On	Off
COM3 (3E8h)	Off	On
COM4 (2E8h)	On	On

INTERRUPT SELECTION

IRQ	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F	JP1/G	JP1/H	JP1/I
3	Open	Open	Open	Open	Open	Open	Open	Open	Closed
4	Open	Open	Open	Open	Open	Open	Open	Closed	Open
5	Open	Open	Open	Open	Open	Open	Closed	Open	Open
7	Open	Open	Open	Open	Open	Closed	Open	Open	Open
9	Open	Open	Open	Open	Closed	Open	Open	Open	Open
10	Open	Open	Open	Closed	Open	Open	Open	Open	Open
11	Open	Open	Closed	Open	Open	Open	Open	Open	Open
12	Open	Closed	Open	Open	Open	Open	Open	Open	Open
15	Closed	Open	Open	Open	Open	Open	Open	Open	Open

SUPPORTED COMMAND SET

Basic AT Commands

AT, **■+++■**, A/

A, C, E, F, H, M, Q, V

&C, &F, &G, &V, &Z

Extended AT Commands

\V

Special Commands

-C

S Registers

S0, S1, S2, S3, S4, S5, S10, S30

Note: See MHI Help File for full command documentation.

Proprietary AT Command Set

For a full command summary, see MULTI-TECH SYSTEMS, INC. MT5634ZPW, MT3356ZPW, MT3334ZPW