


CMS ENHANCEMENTS, INC.
HCWD3VSR2/HCWD6VSR2

Q3/94

Data bus: 16-bit ISA
Size: Three-quarter length, full-height card
Hard drive supported: Two RLL ST412 drives
Floppy drives supported: 320KB, 360KB, 720KB, 1.2MB, 1.44MB

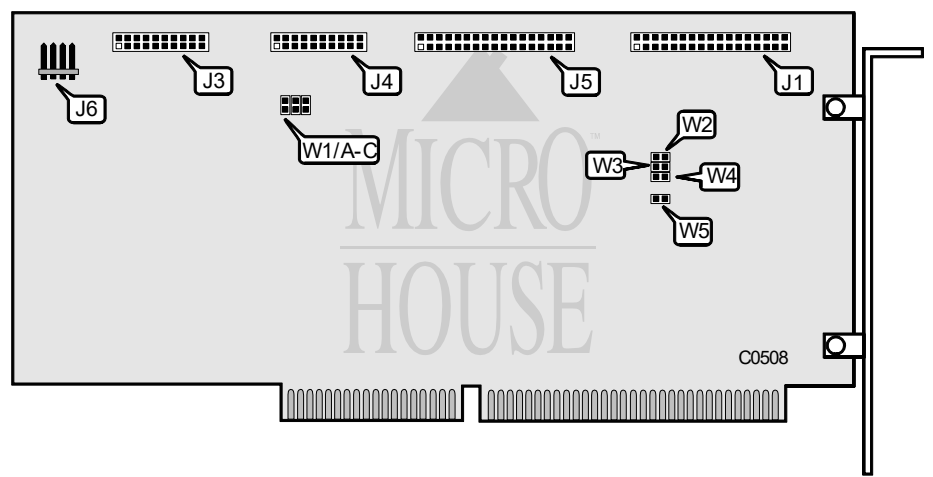

CONNECTIONS	
Function	Location
34-pin control cable connector - floppy drive	J1
20-pin data cable connector - drive 1	J3
20-pin data cable connector - drive 0	J4
34-pin control cable connector - hard drive	J5
External LED connector	J6

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Latched hard disk mode enabled	W1/A	open
Non-latched hard disk mode enabled	W1/A	closed
í Four byte ECC enabled	W1/B	open
Seven byte ECC enabled	W1/B	closed
í Caching enabled	W1/C	open
Caching disabled	W1/C	closed
í BIOS enabled	W2	open
BIOS disabled	W2	closed

Continued on next page. . .

CMS ENHANCEMENTS, INC.
HCWD3VSR2/HCWD6VSR2

. . .continued from previous page

USER CONFIGURABLE SETTINGS(CONTINUED)		
Function	Location	Setting
Primary hard disk I/O address select	W3	open
Alternate hard disk I/O address select	W3	closed
Primary floppy drive I/O address select	W4	open
Alternate floppy drive I/O address select	W4	closed
Single speed floppy drive mode enabled	W5	open
Dual speed floppy drive mode enabled	W5	closed