


CMS ENHANCEMENTS, INC.
CMS IDE HOST ADAPTER

Q3/94

Data bus: 16-bit ISA
Size: Three-quarter length, full-height card
Hard drive supported: 2 IDE(AT) interface drives
Floppy drives supported: 360KB, 720KB, 1.2MB, 1.44MB

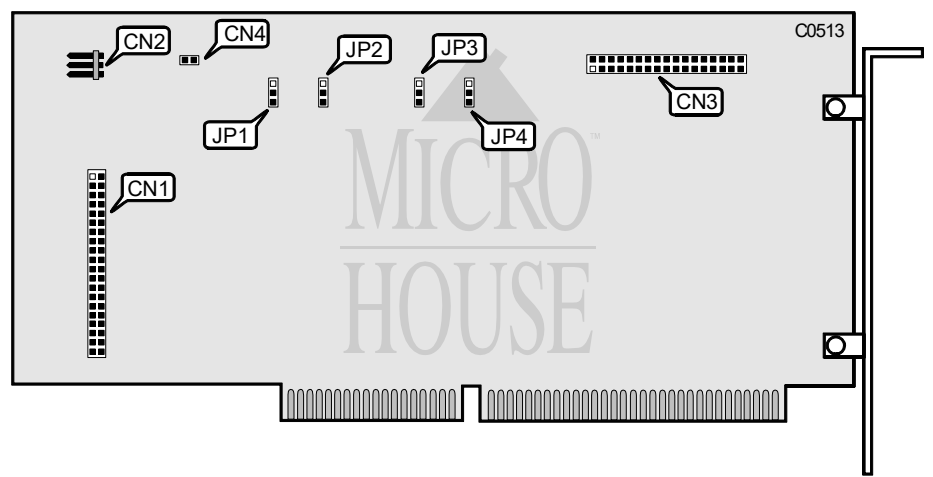

CONNECTIONS	
Function	Location
40-pin IDE(AT) interface connector	CN1
External power connector	CN2
34-pin control cable connector - floppy drive	CN3
External drive active LED connector	CN4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive interface primary address select(3F _{xh})	JP1	pins 1 & 2 closed
Floppy drive interface alternate address select(37 _{xh})	JP1	pins 2 & 3 closed
í IDE(AT) interface primary address select(1F _{xh})	JP2	pins 1 & 2 closed
IDE(AT) interface alternate address select(17 _{xh})	JP2	pins 2 & 3 closed
í Floppy drive interface disabled	JP3	pins 1 & 2 closed
Floppy drive interface enabled	JP3	open
í IDE(AT) interface enabled	JP4	pins 2 & 3 closed
IDE(AT) interface disabled	JP4	pins 1 & 2 closed