


MOMENTA WS-5614JS3(G)

Card Type	Modem/Fax card
Chip Set	Unidentified
I/O Options	Line out (RJ-11), line in (RJ-11)
Maximum Modem Rate	56Kbps
Maximum Fax Rate	14.4Kbps
Data Modulation Protocol	Bell 103A/212A
	ITU-T V.22, V.22bis, V.32, V.32 bis, V.34, K56flex, V.80
Fax Modulation Protocol	ITU-T V.17, V.21CH2, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis
Fax Class	Class I
Data Bus	8-bit ISA

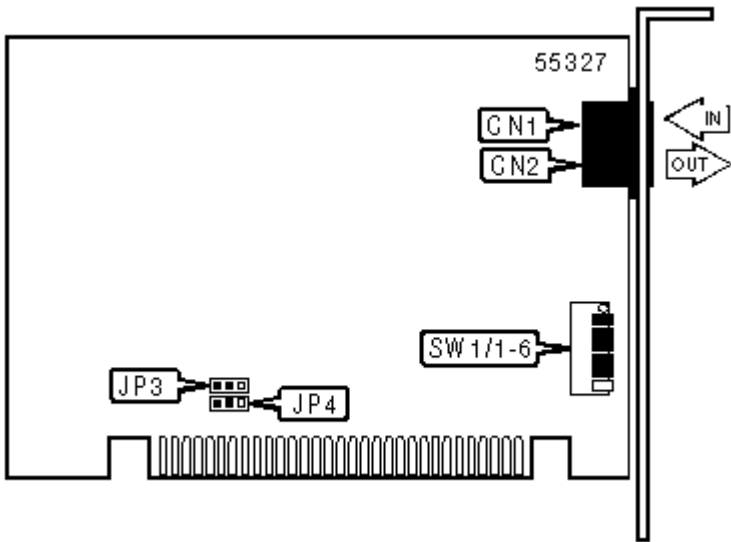

CONNECTIONS

Function	Label	Function	Label
Line In	CN1	Line out	CN2

PLUG & PLAY CONFIGURATION

Setting	JP3	JP4
Plug & Play enabled	Pins 1 & 2 closed	Pins 1 & 2 closed
Plug & play disabled	Pins 2 & 3 closed	Pins 2 & 3 closed

SERIAL PORT ADDRESS/INTERRUPT

Setting	IRQ	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
COM1 (3F8h)	IRQ4	On	On	Off	Off	On	Off
COM2 (2F8h)	IRQ3	Off	On	Off	On	Off	Off
COM3 (3E8h)	IRQ5	On	Off	Off	Off	Off	On

COM3 (3E8h)	IRQ4	On	Off	Off	Off	On	Off
COM4 (2E8h)	IRQ2	Off	Off	On	Off	Off	Off
■ COM4 (2E8h)	IRQ3	Off	Off	Off	On	Off	Off
Disabled	Disabled	Off	Off	Off	Off	Off	Off

Note: Settings should be disabled when using Plug n■ Play mode.

SUPPORTED COMMAND SET

Basic AT Commands

AT, ■+++■, A/  
 A, B, E, H, M, O, P, Q, S, T, V, X, Y, Z  
 &C, &P, &R, &T, &V, &W, &Y, &Z

Extended AT Commands

\A, \B, \K, \N  
 %C, %E, %L, %Q

Special Commands

+MS

S Registers

S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S23, S24, S25  
 S26, S27, S28, S29, S30, S31, S32, S33, S36, S37, S38, S39, S40  
 S41, S46, S48, S82, S86, S91, S92, S95

**Note:** See MHI Help File for full command documentation.

Proprietary AT Command Set

For a full command summary, see MEDIAFORTE PRODUCTS PTE., LTD., MOMENTA K56 EXTERNAL MODEM