


CMS ENHANCEMENTS, INC.
HCWDXTGEN

Q3/94

Data bus: 8-bit ISA
Size: Half length, full-height card
Hard drive supported: Two MFM ST506/412 drives
Floppy drives supported: None

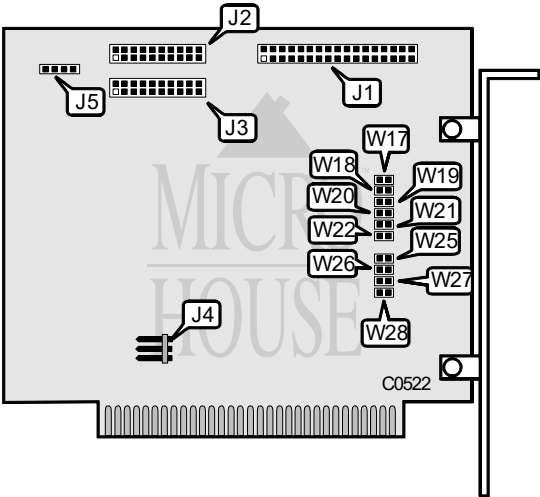

CONNECTIONS	
Function	Location
34-pin data cable connector - hard drive	J1
20-pin data cable connector - drive 0	J2
20-pin data cable connector - drive 1	J3
External power connector	J4
4-pin connector - drive active LED	J5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
! Factory configured - do not alter	W25	open
! Factory configured - do not alter	W26	open
! Interrupt select IRQ5	W27	open
Interrupt select IRQ2	W27	closed
! AT compatibility mode enabled	W28	closed
XT compatibility mode enabled	W28	open

Continued on next page. . .

CMS ENHANCEMENTS, INC. HCWDXTGEN

...continued from previous page

ADDRESS SELECT			
I/O Address	Base Memory Address	W21	W22
320h	C8000h	open	open
324h	CA000h	closed	open
328h	CC000h	open	closed
32Ch	CE000h	closed	closed

PRE-SELECTED DRIVE CONFIGURATION						
Drive 0				Drive 1		
Capacity	Heads	Cylinders	W17	W18	W19	W20
1 21MB	4	615	open	open	open	open
21MB	4	612	closed	closed	closed	closed
10MB	4	306	open	closed	open	closed
10MB	2	615	closed	open	closed	open