


CMS ENHANCEMENTS, INC.  
HCWD27X

Q3/94

Data bus: 8-bit ISA  
Size: Half length, full-height card  
Hard drive supported: Two RLL ST506/412 drives  
Floppy drives supported: None

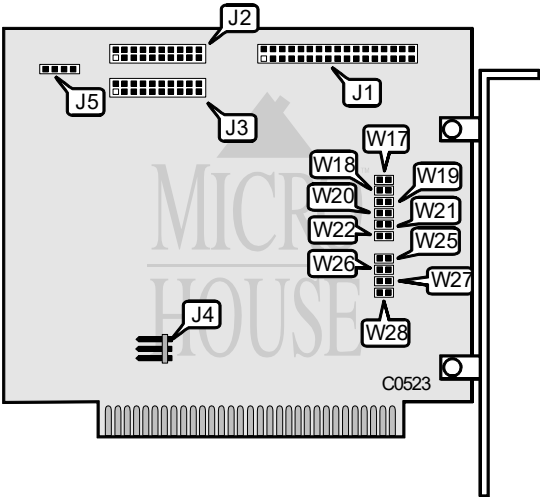

CONNECTIONS	
Function	Location
34-pin data cable connector - hard drive	J1
20-pin data cable connector - drive 0	J2
20-pin data cable connector - drive 1	J3
External power connector	J4
4-pin connector - drive active LED	J5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Interrupt select IRQ5	W27	open
Interrupt select IRQ2	W27	closed
AT compatibility enabled	W28	closed
XT compatibility enabled	W28	open

Continued on next page. . .

# CMS ENHANCEMENTS, INC.

## HCWD27X

...continued from previous page

ADDRESS SELECT			
I/O Address	Base Memory Address	W21	W22
í 320h	C8000h	open	open
324h	CA000h	closed	open
328h	CC000h	open	closed
32Ch	CE000h	closed	closed

PRE-SELECTED DRIVE CONFIGURATION						
Drive 0				Drive 1		
Capacity	Heads	Cylinders	W17	W18	W19	W20
í 32MB	4	615	open	open	open	open
65MB	6	820	closed	closed	closed	closed
42MB	4	782	open	closed	open	closed
21MB	2	782	closed	open	closed	open

TRANSLATION				
Setting	Dynamic	Sectors	W25	W26
í Disabled	Yes	26	open	closed
Enabled	No	17	closed	open