


SILICON VALLEY COMPUTER, INC. ADP60LIB/ADP60LIBF

Q3/94

Data bus: 16-bit ISA
 Size: Half-length, Full-height card
 Hard drive supported: 2 IDE(AT) interface drives
 Floppy drives supported: 360KB, 720KB, 1.2MB, 1.44MB

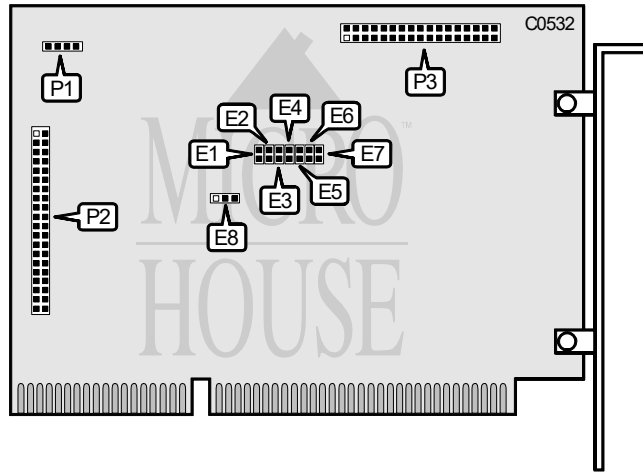

CONNECTIONS	
Function	Location
4-pin connector - drive active LED	P1
40-pin IDE(AT) interface connector	P2
34-pin control cable connector - floppy drive	P3

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive interface enabled	E1	open
Floppy drive interface disabled	E1	closed
í Dual speed floppy drive	E2	open
Single speed floppy drive	E2	closed
í Floppy drive interface precompensation 187ns	E3	open
Floppy drive interface precompensation 125ns	E3	closed
í Hard drive address 1F0 - 1F7h select	E4	open
Hard drive address 170 - 177h select	E4	closed

Continued on next page. . .

SILICON VALLEY COMPUTER, INC.
ADP60LIB/ADP60LIBF

. . .continued from previous page

USER CONFIGURABLE SETTINGS(CONTINUED)		
Function	Location	Setting
í Base memory address C800h select	E5	open
Base memory address CA00h select	E5	closed
í 8KB BIOS select	E6	open
16KB BIOS select	E6	closed
í On-board BIOS enabled	E7	closed
On-board BIOS disabled	E7	open
í Factory configured - do not alter	E8	pins 1 & 2 closed