


COMPUADD, INC.
HARDCACHE/SCSI

Q2/92

Data bus: 16-bit, ISA
Size: Full-length, full-height card
Hard drives supported: Two SCSI drives, up to 5 other SCSI devices
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

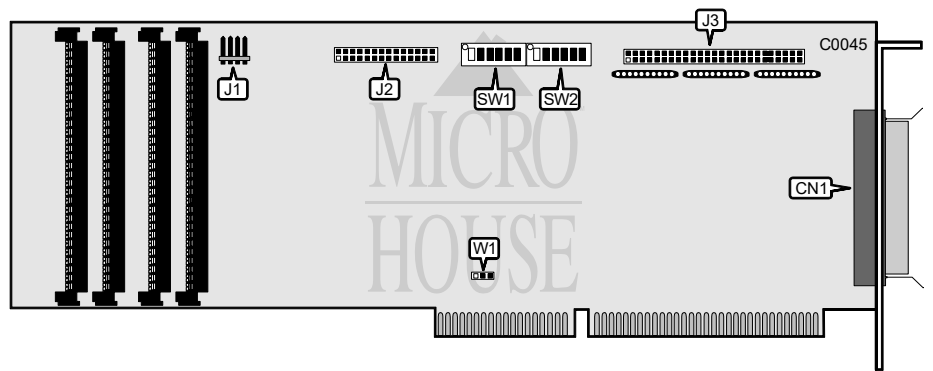

CONNECTIONS	
Function	Location
50-pin SCSI connector-external	CN1
4-pin connector-drive active LED	J1
34-pin data cable connector-floppy drive	J2
50-pin SCSI connector-internal	J3

Continued on next page . . .

COMPUADD, INC. HARDCACHE/SCSI

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Block Data Transfer mode	SW1/switch 1	on
IRQ-Paced Data Transfer mode	SW1/switch 1	off
í Read config. sector on drive 0	SW1/switch 2	on
Read config. data in firmware	SW1/switch 2	off
í Floppy drive address 3F0-3F7h	SW1/switch 3	off
Floppy drive address 370-377h	SW1/switch 3	on
í Floppy drive enabled	SW1/switch 4	off
Floppy drive disabled	SW1/switch 4	on
í Single-speed floppy drive supported	SW1/switch 5	off
Dual-speed floppy drive supported	SW1/switch 5	on
í BIOS enabled	SW1/switch 6	on
BIOS disabled	SW1/switch 6	off
í BIOS address C800-C9FFh	SW2/switch 1	off
BIOS address CA00-CBFFh	SW2/switch 1	on
í Hard drive address 1F0-1F7h	SW2/switch 2	off
Hard drive address 170-177h	SW2/switch 2	on
í 256KB SIMM's supported	SW2/switch 6	on
1MB SIMM's supported	SW2/switch 6	off
í Hard Drive Interrupt is IRQ14	W1	pins 1 & 2 closed
Hard Drive Interrupt is IRQ10	W1	pins 2 & 3 closed

SCSI ADDRESS			
SCSI ID	SW2/switch 3	SW2/switch 4	SW2/switch 5
0	off	off	off
1	off	off	on
2	off	on	off
3	off	on	on
4	on	off	off
5	on	off	on
6	on	on	off
í 7	on	on	on