


PROMISE TECHNOLOGY, INC.
DC200M

Q3/94

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard drive supported: Four IDE (AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, 1.44MB, or 2.88MB drives

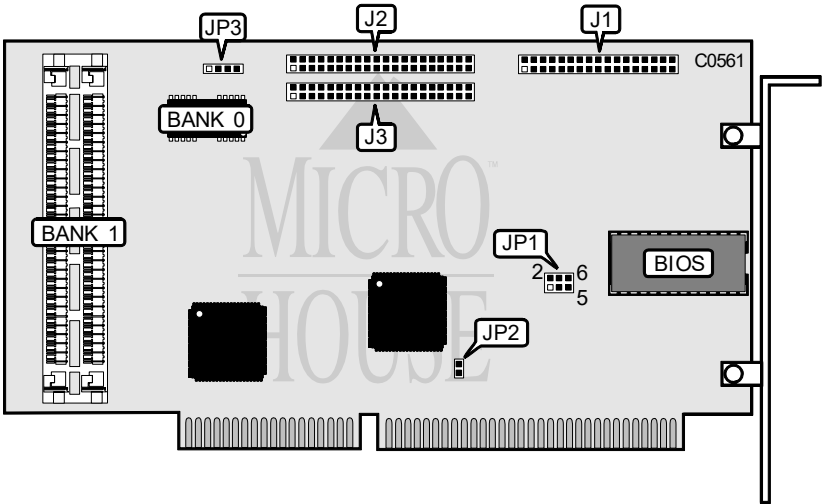

CONNECTIONS		
Function		Location
34-pin data cable connector - floppy drive		J1
40-pin control cable - IDE interface 1		J2
40-pin control cable - IDE interface 2		J3
4-pin connector - drive active LED		JP3

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i DC-200M is sole controller	JP1	pins 3 & 4 closed
DC-200M is secondary controller with interrupt IRQ12	JP1	pins 1 & 2 closed
DC-200M is secondary controller with interrupt IRQ15	JP1	pins 5 & 6 closed
i Floppy drive interface enabled	JP2	closed
Floppy drive interface disabled	JP2	open

Continued on next page. . .

PROMISE TECHNOLOGY, INC. DC200M

...continued from previous page

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(1) 512K x 9	NONE
1MB	(1) 512K x 9	(2) 256K x 9
2.5MB	(1) 512K x 9	(2) 1M x 9
8.5MB	(1) 512K x 9	(2) 4M x 9

MISCELLANEOUS TECHNICAL NOTE	
Note:	Cache mode must disabled while installing operating systems other than DOS.