


PROMISE TECHNOLOGY, INC.
DC99, DC99M

Q4/92

Data bus:	16-bit, ISA
Size:	Half-length, full-height card
Hard drives supported:	Two AT Interface (IDE) drives
Floppy drives supported:	Two 360KB, 720KB, 1.2MB, or 1.44MB

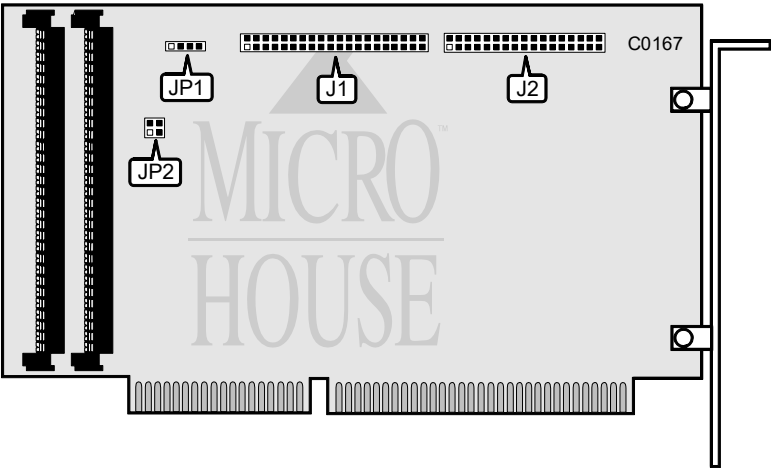

CONNECTIONS	
Function	Location
40-pin AT Interface (IDE) connector	J1
34-pin control cable connector-floppy drive	J2
4-pin connector-drive active LED	JP1

Continued on next page . . .

PROMISE TECHNOLOGY, INC.

DC99, DC99M

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
<i>i</i> Floppy drive enabled	JP2	pins 1 & 2 closed
Floppy drive disabled	JP2	pins 1 & 2 open
<i>i</i> Factory configured - do not alter	JP2	pins 3 & 4 open

CACHE CONFIGURATION	
Size	Cache
512KB	(2) 256K x 9
2MB	(2) 1M x 9
8MB	(2) 4M x 9
Note: When configuring the cache, both SIMM sockets must be occupied with identical SIMM's; i.e.: two 256KB, 1MB, or 4MB SIMM's. The modules may be 8 or 9-bits wide and must be 80nsec or faster.	

MISCELLANEOUS TECHNICAL NOTES
Warning: Do not reset or power-down the system while the drive active LED is lit! Data in cache RAM will be lost!