


BUSLOGIC INC.
BT-540CF

Data bus:	16-bit, ISA-bus
Size:	Full-length, full-height card
Hard drive supported:	Up to seven SCSI devices
Floppy drives supported:	None

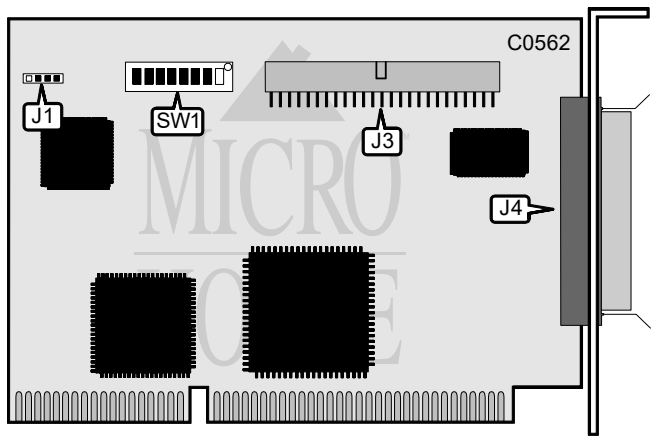

CONNECTIONS		
Function		Location
4-pin connector - drive active LED		J1
50-pin connector - internal SCSI interface		J3
50-pin connector - external SCSI-2 interface		J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Factory configured - do not alter	SW1/4	N/A
i Factory configured - do not alter	SW1/8	N/A

Continued on next page . . .

BUSLOGIC INC.
BT-540C

. . . continued from previous page

PORT ADDRESS CONFIGURATION			
Port Address	SW1/1	SW1/2	SW1/3
i 330	On	On	On
130	On	On	Off
134	Off	On	Off
230	On	Off	On
234	Off	Off	On
334	Off	On	On
N/A	N/A	Off	Off

BIOS ADDRESS CONFIGURATION			
BIOS Address	SW1/5	SW1/6	SW1/7
i DC000	On	On	On
CC000	On	On	Off
C8000	Off	On	Off
D0000	Off	Off	On
D4000	On	Off	On
D8000	Off	On	On
Disabled	N/A	Off	Off