


QUICKPATH SYSTEMS, INC. PORT FOLIO

Q4/92

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drives supported: Two AT Interface (IDE) drives
 Floppy drives supported: Four 360KB, 720KB, 1.2MB, or 1.44MB

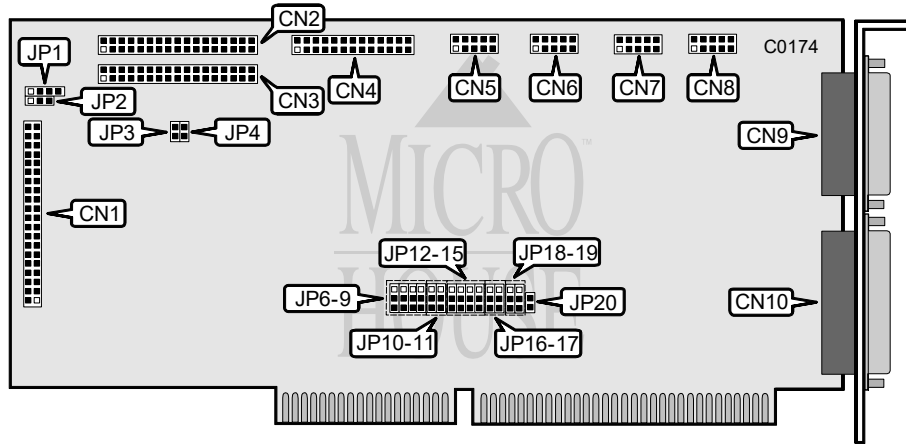

CONNECTIONS	
Function	Location
40-pin AT Interface (IDE) control cable connector-internal	CN1
34-pin data cable connector-floppy drive 1 & 2	CN2
34-pin data cable connector-floppy drive 3 & 4	CN3
25-pin parallel port-internal	CN4
9-pin serial port #4-internal	CN5
9-pin serial port #3-internal	CN6
9-pin serial port #2-internal	CN7
9-pin serial port #1-internal	CN8
15-pin game port-external	CN9
25-pin parallel port-external	CN10
4-pin connector-drive active LED	JP1

Continued on next page . . .

QUICKPATH SYSTEMS, INC. PORT FOLIO

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í IRQ14 delay disabled	JP2	pins 1 & 2 closed
IRQ14 delay enabled	JP2	pins 2 & 3 closed
í Floppy drive enabled	JP3	closed
Floppy drive disabled	JP3	open
í Floppy drive address is 3F0-3F7h	JP4	open
Floppy drive address is 370-377h	JP4	closed
í Serial port 1 (CN8) address is 3F8-3FFh	JP6	pins 2 & 3 closed
Serial port 1 (CN8) address is 2F8-2FFh	JP6	pins 1 & 2 closed
Serial port disabled	JP6	open
í Serial port 2 (CN7) address is 2F8-2FFh	JP7	pins 1 & 2 closed
Serial port 2 (CN7) address is 3F8-3FFh	JP7	pins 2 & 3 closed
Serial port disabled	JP7	open
í Serial port 3 (CN6) address is 3E8-3EFh	JP8	pins 2 & 3 closed
Serial port 3 (CN6) address is 2E8-2EFh	JP8	pins 1 & 2 closed
Serial port disabled	JP8	open
í Serial port 4 (CN5) address is 2E8-2EFh	JP9	pins 1 & 2 closed
Serial port 4 (CN5) address is 3E8-3EFh	JP9	pins 2 & 3 closed
Serial port disabled	JP9	open
í Parallel port 1 (CN10) address is 378-37Fh	JP10	pins 2 & 3 closed
Parallel port 1 (CN10) address is 278-27Fh	JP10	pins 1 & 2 closed
Parallel port disabled	JP10	open
í Parallel port 2 (CN4) address is 278-27Fh	JP11	pins 1 & 2 closed
Parallel port 2 (CN4) address is 378-37Fh	JP11	pins 2 & 3 closed
Parallel port disabled	JP11	open
í Serial port 1 (CN8) is IRQ4	JP12	pins 2 & 3 closed
Serial port 1 (CN8) is IRQ3	JP12	pins 1 & 2 closed
Serial port disabled	JP12	open
í Serial port 2 (CN7) is IRQ3	JP13	pins 1 & 2 closed
Serial port 2 (CN7) is IRQ4	JP13	pins 2 & 3 closed
Serial port disabled	JP13	open
í Serial port 3 (CN6) is IRQ4	JP14	pins 2 & 3 closed
Serial port 3 (CN6) is IRQ3	JP14	pins 1 & 2 closed
Serial port disabled	JP14	open

Continued on next page ...

QUICKPATH SYSTEMS, INC.

PORT FOLIO

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Serial port 4 (CN5) is IRQ3	JP15	pins 1 & 2 closed
Serial port 4 (CN5) is IRQ4	JP15	pins 2 & 3 closed
Serial port disabled	JP15	open
í Serial port disabled	JP16	open
Serial port 3 (CN6) is IRQ5	JP16	pins 2 & 3 closed
Serial port 3 (CN6) is IRQ9	JP16	pins 1 & 2 closed
í Serial port disabled	JP17	open
Serial port 4 (CN5) is IRQ5	JP17	pins 2 & 3 closed
Serial port 4 (CN5) is IRQ9	JP17	pins 1 & 2 closed
í Parallel port 1 (CN10) is IRQ7	JP18	pins 1 & 2 closed
Parallel port 1 (CN10) is IRQ5	JP18	pins 2 & 3 closed
Parallel port disabled	JP18	open
í Parallel port 2 (CN4) is IRQ5	JP19	pins 2 & 3 closed
Parallel port 2 (CN4) is IRQ7	JP19	pins 1 & 2 closed
Parallel port disabled	JP19	open
í Hard drive enabled	JP20	closed
Hard drive disabled	JP20	open

