


JPN CORPORATION CA9302

Data Bus: 16-bit ISA
Size: Half-length, half-height card
Hard drives supported: (2) IDE (AT) drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

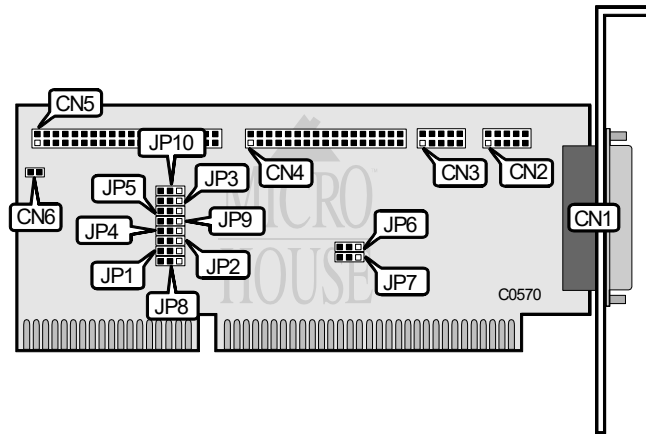

CONNECTIONS	
Function	Location
25-pin connector-parallel port	CN1
10-pin connector-serial port 1	CN2
10-pin connector-serial port 2	CN3
34-pin data cable connector-floppy drive	CN4
40-pin IDE (AT) interface connector internal	CN5
2-pin connector-drive active LED	CN6

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Serial port 1 address-3F8h	JP1	Pins 1 & 2 closed
Serial port 2 address 3E8h	JP1	Pins 2 & 3 closed
Serial port 1 enabled	JP2	Pins 1 & 2 closed
Serial port 1 disabled	JP2	Pins 2 & 3 closed
Serial port 2 address 2F8h	JP3	Pins 1 & 2 closed
Serial port 2 address 2E8h	JP3	Pins 2 & 3 closed
Serial port 2 enabled	JP4	Pins 1 & 2 closed
Serial port 2 disabled	JP4	Pins 2 & 3 closed

Continued on next page. . .

JPN CORPORATION
CA9302

...continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Printer port enabled	JP5	Pins 1 & 2 closed
Printer port disabled	JP5	Pins 2 & 3 closed
í Serial port 2 IRQ3 select	JP6	Pins 2 & 3 closed
Serial port 1 IRQ3 select	JP6	Pins 1 & 2 closed
í Serial port 1 IRQ4 select	JP7	Pins 1 & 2 closed
Serial port 2 IRQ4 select	JP7	Pins 2 & 3 closed
í Parallel port address-378h	JP8	Pins 1 & 2 closed
Parallel port address-278h	JP8	Pins 2 & 3 closed
í Hard drive enabled	JP9	Pins 1 & 2 closed
Hard drive disabled	JP9	Pins 2 & 3 closed
í Floppy drive enabled	JP10	Pins 1 & 2 closed
Floppy drive disabled	JP10	Pins 2 & 3 closed