


# PROMISE TECHNOLOGY, INC.

## DC4030VL-2 (REV.2)

Q4/94

Data bus: 32-bit, VL-bus  
 Size: Three/quarter-length, full-height card  
 Hard drive supported: Four IDE (AT) interface drives  
 Floppy drives supported: Four 360KB, 720KB, 1.2MB, 1.44MB, or 2.88MB drives

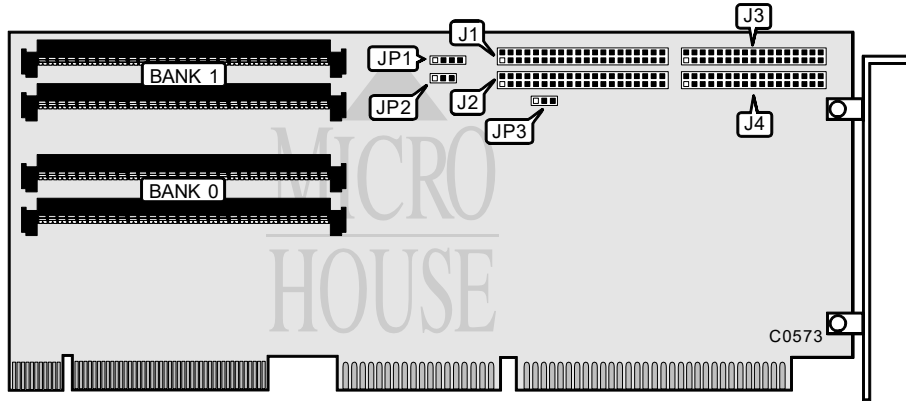

CONNECTIONS	
Function	Location
40-pin IDE (AT) Interface connector - IDE 0, 1	J1
40-pin IDE (AT) Interface connector - IDE 2, 3	J2
34-pin control cable connector - floppy drive - Floppy 0, 1	J3
34-pin control cable connector - floppy drive - Floppy 2, 3	J4
4-pin connector - drive active LED	JP1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Factory configured - do not alter	JP2	pins 2 & 3 closed
Floppy drive enabled	JP3	pins 1 & 2 closed
Floppy drive disabled	JP3	pins 2 & 3 closed

MISCELLANEOUS TECHNICAL NOTES
At least one pair of SIMMs of equal memory size (256KB, 1MB or 4MB of 70ns or faster) must be installed in Bank 0 for the DC4030VL-2 to function.