


WESTERN DIGITAL CORPORATION
WD1003-RA2, WD1003-WA2
*Replaced by the WD1003V-SR2 and WD1003V-MM2
respectively*

Q4/92

Data bus: 16-bit, ISA
Size: Full-length, full-height card
Hard drives supported: WD1003-RA2: Two RLL ST506/412 drives
WD1003-WA2: Two MFM ST506/412 drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB or 1.44MB drives

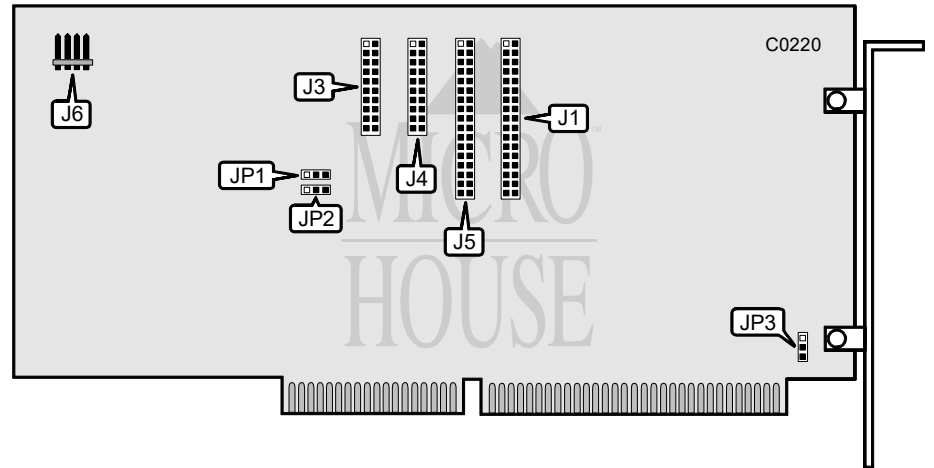

CONNECTIONS	
Function	Location
34-pin data cable connector-floppy drive	J1
20-pin data cable connector-drive 1	J3
20-pin data cable connector-drive 0	J4
34-pin control cable connector-hard drive	J5
4-pin connector-drive active LED	J6

Continued on next page . . .

WESTERN DIGITAL CORPORATION
WD1003-RA2, WD1003-WA2
*Replaced by the WD1003V-SR2
and WD1003V-MM2 respectively*

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Hard drive port address is 1F0-1F7h	JP1	pins 2 & 3 closed
Hard drive port address is 170-177h	JP1	pins 1 & 2 closed
í Floppy drive port address is 3F0-3F7h	JP2	pins 2 & 3 closed
Floppy drive port address is 370-377h	JP2	pins 1 & 2 closed
í Supports 360 RPM floppy drives	JP3	pins 1 & 2 closed
Supports 300 RPM floppy drives	JP3	pins 2 & 3 closed