


# GIGA-BYTE TECHNOLOGY, INC.

## GA-107 REV.2

Q4/94

Data bus: PCI-bus  
 Size: Three/quarter-length, full-height card  
 Hard drive supported: Two IDE (AT) interface drives  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

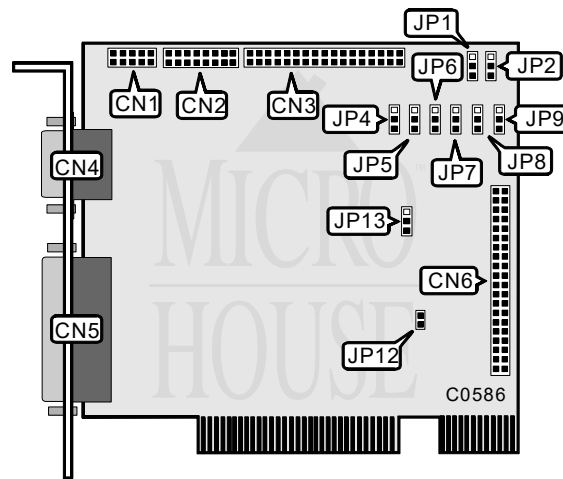

| CONNECTIONS                                   |          |
|---|----------|
| Function                                      | Location |
| 10-pin serial port 2 - internal               | CN1      |
| Game port - internal                          | CN2      |
| 34-pin control cable connector - floppy drive | CN3      |
| 9-pin serial port 1 - external                | CN4      |
| 40-pin IDE (AT) Interface connector           | CN5      |
| Drive active LED connector                    | JP13     |

| USER CONFIGURABLE SETTINGS |          |                   |
|----------------------------|----------|-------------------|
| Function                   | Location | Setting           |
| i Floppy drive enabled     | JP4      | pins 1 & 2 closed |
| Floppy drive disabled      | JP4      | pins 2 & 3 closed |
| i Game port enabled        | JP6      | pins 1 & 2 closed |
| Game port disabled         | JP6      | pins 2 & 3 closed |
| i HDD enabled              | JP12     | open              |
| HDD disabled               | JP12     | closed            |

Continued on next page . . .

# GIGA-BYTE TECHNOLOGY, INC.

## GA-107 REV.2

... continued from previous page

| SERIAL PORT 1 (CN4) CONFIGURATION |                   |                   |
|-----------------------------------|-------------------|-------------------|
| COM                               | JP8               | JP9               |
| COM1                              | pins 1 & 2 closed | pins 1 & 2 closed |
| COM3                              | pins 2 & 3 closed | pins 1 & 2 closed |
| Disabled                          | N/A               | pins 2 & 3 closed |

| SERIAL PORT 2 (CN1) CONFIGURATION |                   |                   |
|-----------------------------------|-------------------|-------------------|
| COM                               | JP1               | JP2               |
| COM2                              | pins 1 & 2 closed | pins 1 & 2 closed |
| COM4                              | pins 2 & 3 closed | pins 1 & 2 closed |
| Disabled                          | N/A               | pins 2 & 3 closed |

| PARALLEL PORT (CN5) CONFIGURATION |                   |                   |
|-----------------------------------|-------------------|-------------------|
| LPT                               | JP5               | JP7               |
| LPT2                              | pins 1 & 2 closed | pins 1 & 2 closed |
| LPT3                              | pins 2 & 3 closed | pins 1 & 2 closed |
| Disabled                          | N/A               | pins 2 & 3 closed |