


MAXTOR CORPORATION
AT ADAPTER BOARD

Q1/93

Data bus: 16-bit, ISA
Size: Half-length, full height card
Hard drives supported: Two IDE (AT) Interface drives
Floppy drives supported: None

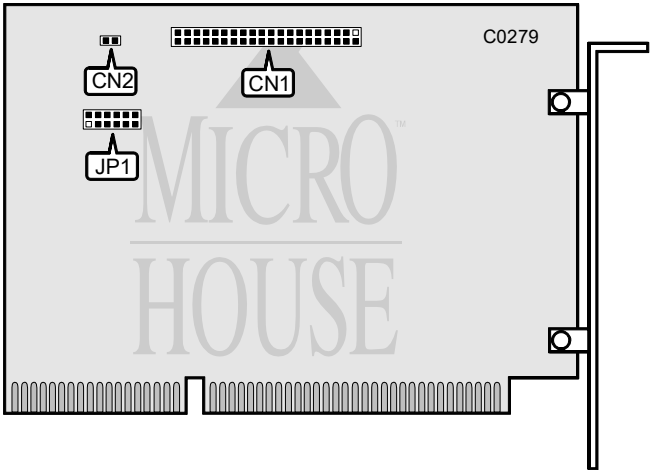

CONNECTIONS	
Function	Location
40-pin AT Interface (IDE) connector-internal	CN1
2-pin connector-drive active LED	CN2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Hard drive port address is 1F0-1F7h	JP1/Jumper 1	open
Hard drive port address is 170-177h	JP1/Jumper 1	closed
i I/O Channel Ready enabled	JP1/Jumper 2	closed
I/O Channel Ready disabled	JP1/Jumper 2	open
i Factory configured - do not alter	JP1/Jumper 3	open
i Factory configured - do not alter	JP1/Jumper 4	closed
i Factory configured - do not alter	JP1/Jumper 5	open
i Drive active LED enabled	JP1/Jumper 6	closed
Drive active LED disabled	JP1/Jumper 6	open