


SANYO BUSINESS SYSTEMS CORPORATION
SMILE/AT 002

Q1/93

Data bus: 16-bit, ISA
Size: Full-length, full-height card
Hard drives supported: Up to seven SCSI devices
Floppy drives supported: None

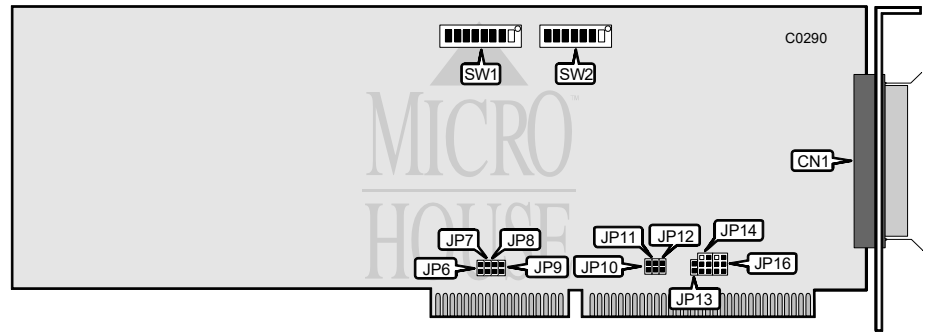

CONNECTIONS	
Function	Location
25-pin SCSI connector-external	CN1

IRQ SELECT JUMPERS								
IRQ	JP6	JP7	JP8	JP9	JP10	JP11	JP12	JP13
IRQ15	closed	open	open	open	open	open	open	open
IRQ12	open	closed	open	open	open	open	open	open
IRQ11	open	open	closed	open	open	open	open	open
IRQ10	open	open	open	closed	open	open	open	open
IRQ3	open	open	open	open	closed	open	open	open
IRQ4	open	open	open	open	open	closed	open	open
IRQ5	open	open	open	open	open	open	closed	open
IRQ7	open	open	open	open	open	open	open	closed

Continued on next page . . .

SANYO BUSINESS SYSTEMS CORPORATION SMILE/AT 002

... continued from previous page

ON-BOARD RAM ADDRESS					
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5 - 8
C0000h	open	open	closed	closed	closed
90000h	open	closed	closed	open	closed
A0000h	open	closed	open	closed	closed
B0000h	open	closed	open	open	closed
D0000	open	open	closed	open	closed

ON-BOARD ROM ADDRESS							
Address	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7
D8000h	closed	open	open	closed	closed	closed	closed
C8000h	closed	closed	open	closed	closed	closed	closed
C8800h	closed	closed	open	closed	closed	closed	open
CF800h	closed	closed	open	open	open	open	open
D0000h	closed	open	closed	closed	closed	closed	closed
DF000h	closed	open	open	open	open	open	closed
DF800h	closed	open	open	open	open	open	open

MISCELLANEOUS TECHNICAL NOTES	
JP14 and JP16 are used to configure the BIOS EPROM size. The default is Jumper 1 and 2 open, and Jumper 3 closed for 2KB.	