


# SANYO BUSINESS SYSTEMS CORPORATION

## SMILE/AT 005

Q1/93

Data bus: 16-bit, ISA  
 Size: Full-length, full-height card  
 Hard drive supported: Up to seven SCSI devices  
 Floppy drives supported: None

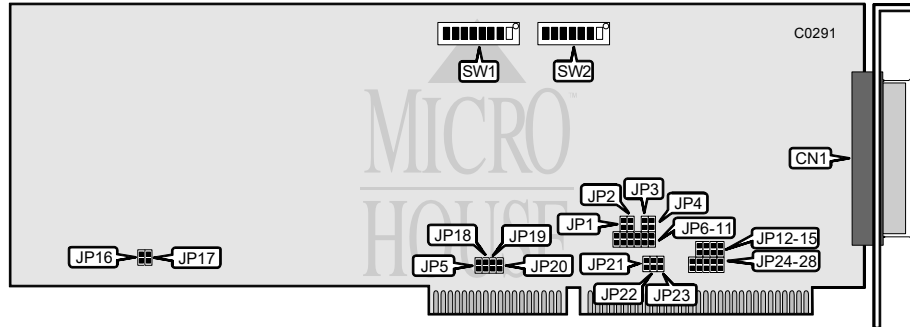

CONNECTIONS	
Function	Location
25-pin SCSI connector-external	CN1

IRQ SELECT JUMPERS									
IRQ	JP5	JP18	JP19	JP20	JP21	JP22	JP23	JP24	
IRQ15	closed	open	open	open	open	open	open	open	
IRQ12	open	closed	open	open	open	open	open	open	
IRQ11	open	open	closed	open	open	open	open	open	
IRQ10	open	open	open	closed	open	open	open	open	
IRQ3	open	open	open	open	closed	open	open	open	
IRQ4	open	open	open	open	open	closed	open	open	
IRQ5	open	open	open	open	open	open	closed	open	
IRQ7	open	open	open	open	open	open	open	closed	

Continued on next page . . .

# SANYO BUSINESS SYSTEMS CORPORATION

## SMILE/AT 005

... continued from previous page

ON-BOARD RAM CONFIGURATION JUMPERS		
Ram	JP16	JP17
8Kx8 memory chips	closed	open
32Kx8 memory chips	open	closed

ON-BOARD ROM ADDRESS							
Address	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
i D8000h	on	off	off	on	on	on	on
C8000h	on	on	off	on	on	on	on
C8800h	on	on	off	on	on	on	off
CF800h	on	on	off	off	off	off	off
D0000h	on	off	on	on	on	on	on
DF000h	on	off	off	off	off	off	on
DF800h	on	off	off	off	off	off	off

ON-BOARD RAM ADDRESS					
Address	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5 - 8
i C0000h	off	off	on	on	on
90000h	off	on	on	off	on
A0000h	off	on	off	on	on
B0000h	off	on	off	off	on
D0000h	off	off	on	off	on

MISCELLANEOUS TECHNICAL NOTES	
JP1-JP4, JP6-JP15, and JP25-JP28 are used to configure the BIOS EPROM size. The default is JP1, JP2, JP3, JP4, JP25, JP25, and JP26 closed for 2KB.	