


TRANTOR SYSTEMS, LTD.
T160

Q2/95

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard drives supported: Up to seven SCSI devices

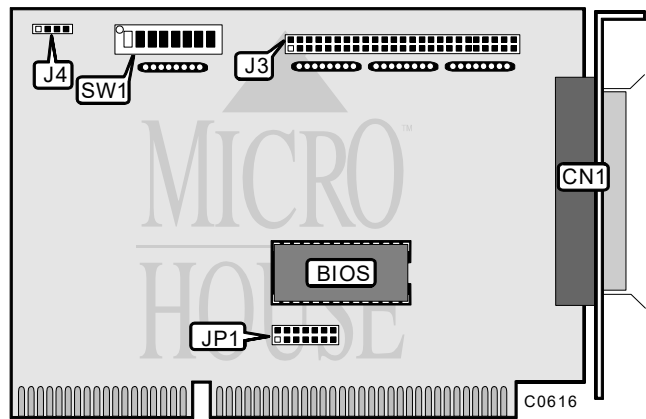

| CONNECTIONS | |
|------------------------------------|----------|
| Function | Location |
| 25-pin SCSI connector-external | CN1 |
| 50-pin SCSI connector-internal | J3 |
| 4-pin connector - drive active LED | J4 |

| INTERRUPT REQUEST - JP1 | | | | | | | |
|-------------------------|----------|----------|----------|----------|----------|----------|----------|
| IRQ | Jumper 1 | Jumper 2 | Jumper 3 | Jumper 4 | Jumper 5 | Jumper 6 | Jumper 7 |
| í none | open | open | open | open | open | open | open |
| IRQ3 | closed | open | open | open | open | open | open |
| IRQ5 | open | closed | open | open | open | open | open |
| IRQ7 | open | open | closed | open | open | open | open |
| IRQ10 | open | open | open | closed | open | open | open |
| IRQ12 | open | open | open | open | closed | open | open |
| IRQ14 | open | open | open | open | open | close | open |
| IRQ15 | open | open | open | open | open | open | closed |

Continued on next page . . .

TRANTOR SYSTEMS, LTD. T160

... continued from previous page

| I/O PORT ADDRESS - SW1 | | | |
|------------------------|----------|----------|----------|
| Address | Switch 1 | Switch 2 | Switch 3 |
| 360h | off | off | off |
| 230h | on | on | on |
| 240h | on | on | off |
| 250h | on | off | on |
| 260h | on | off | off |
| 330h | off | on | on |
| 340h | off | on | off |
| 350h | off | off | on |

| BIOS ADDRESS - SW1 | | | |
|--------------------|----------|----------|----------|
| Address | Switch 4 | Switch 5 | Switch 6 |
| Disabled | off | off | off |
| C8000h | off | off | on |
| CA000h | off | on | off |
| CE000h | off | on | on |
| D0000h | on | off | off |
| D4000h | on | off | on |
| D8000h | on | on | off |
| DC000h | on | on | on |

| MISCELLANEOUS TECHNICAL NOTES | |
|---|--|
| SW1 switches 7 and 8 are factory configured - do not alter. | |