


ATC/UNITRON COMPUTERS & COMPUTER PARTS
QUICK TECHNOLOGY, INC.
SIDE JR. PRO

Q3/95

Data bus: 32-bit VL-Bus
Size: Three/quarter-length, half-height card
Hard drive supported: Four IDE(AT) interface devices
Floppy drives supported: Two 360KB, 720KB, 1.2MB, 1.44MB or 2.88MB drives

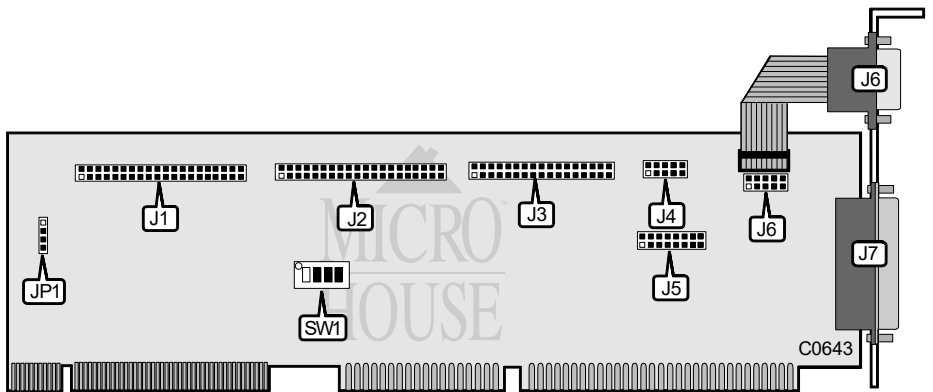

CONNECTIONS	
Function	Location
40-pin connector - primary IDE(AT) interface	J1
40-pin connector - secondary IDE(AT) interface	J2
34-pin floppy drive controller	J3
10-pin serial port 2 - internal	J4
16-pin game port	J5
10-pin (internal)/9-pin (external) serial port 1	J6
25-pin parallel port - external	J7
4-pin connector - drive active LED	JP1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
IDE I/O address is AD4h/AD8h/ADCh	SW1/4	off
IDE I/O address is B4h/B8h/BCCh	SW1/4	on

Continued on next page. . .

ATC/UNITRON COMPUTERS & COMPUTER PARTS
QUICK TECHNOLOGY, INC.
SIDE JR. PRO

...continued from previous page

BASE I/O ADDRESS			
Address	SW1/1	SW1/2	SW1/3
C8000h	off	off	off
CC000h	off	off	on
D0000h	off	on	off
D4000h	off	on	on
D8000h	on	off	off
DC000h	on	off	on
E0000h	on	on	off
Disabled	on	on	on