
Q3/95

ATC/UNITRON COMPUTERS & COMPUTER PARTS QUICK TECHNOLOGY, INC. IW-2910 (REV. 1.1)

Data bus: 32-bit PCI

Size: Half-length, full-height card
Hard drive supported: Four IDE(AT) interface devices

Floppy drives supported: None

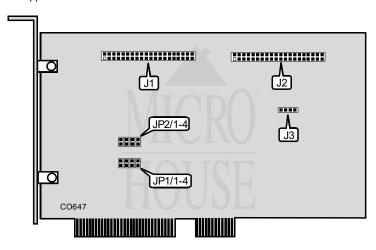

CONNECTIONS	
Function	Location
40-pin connector - primary IDE(AT) interface	J1
40-pin connector - secondary IDE(AT) interface	J2
4-pin connector - drive active LED	J3

PCI INTERRUPTS SELECTIION FOR PRIMARY IDE INTERFAC :						
INT	JP1/1	JP1/2	JP1/3	JP1/4		
í INTB	open	closed	open	open		
INTA	closed	open	open	open		
INTC	open	open	closed	open		
INTD	open	open	open	closed		

PCI INTERRUPTS SELECTIION FOR SECONDARY IDE INTERF/CE						
INT	JP2/1	JP2/2	JP2/3	JP2/4		
í INTA	closed	open	open	open		
INTB	open	closed	open	open		
INTC	open	open	closed	open		
INTD	open	open	open	closed		