


ASKA TECHNOLOGIES

ASKA-2845-E

strangest5

Q1/95

Data bus: 16-bit, ISA
 Size: Half-length, half-height card
 Hard drive supported: Two IDE (AT) interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

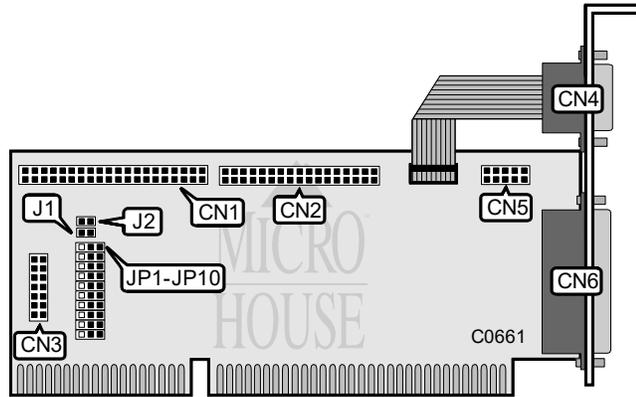

CONNECTIONS	
Function	Location
40-pin IDE (AT) Interface connector	CN1
34-pin control cable connector - floppy drive	CN2
Game port	CN3
9-pin serial port 1 - external	CN4
10-pin serial port 2 - internal	CN5
25-pin parallel port	CN6
2-pin connector - drive active LED	J2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
<input type="checkbox"/> I/O Channel Ready signal disabled	J1	Open
<input type="checkbox"/> I/O Channel Ready signal enabled	J1	Closed
<input type="checkbox"/> Game port enabled	JP3	Pins 1 & 2 closed
<input type="checkbox"/> Game port disabled	JP3	Pins 2 & 3 closed
<input type="checkbox"/> Floppy drive enabled	JP7	Pins 1 & 2 closed
<input type="checkbox"/> Floppy drive disabled	JP7	Pins 2 & 3 closed
<input type="checkbox"/> HDC exists	JP8	Pins 1 & 2 closed
<input type="checkbox"/> HDC does not exist	JP8	Pins 2 & 3 closed
<input type="checkbox"/> HDD enabled	JP9	Pins 1 & 2 closed
<input type="checkbox"/> HDD disabled	JP9	Pins 2 & 3 closed

Continued on next page . . .

ASKA TECHNOLOGIES
ASKA-2845-E

... continued from previous page

SERIAL PORT 2 CONFIGURATION		
COM/Address	JP1	JP2
COM2/2F8h	Pins : & 2 closed	Pins : & 2 closed
COM4/2E8h	Pins : & 3 closed	Pins : & 2 closed
Disabled	N/A	Pins : & 3 closed

SERIAL PORT 1 CONFIGURATION		
COM/Address	JP4	JP6
COM1/3F8h	Pins : & 2 closed	Pins : & 2 closed
COM3/3E8h	Pins : & 3 closed	Pins : & 2 closed
Disabled	N/A	Pins : & 3 closed

PARALLEL PORT CONFIGURATION		
LPT/Address	JP5	JP10
LPT1/378h	Pins : & 2 closed	Pins : & 2 closed
LPT2/278h	Pins : & 3 closed	Pins : & 2 closed
Disabled	N/A	Pins : & 3 closed